

PANZERI

East

220-240V AC


XGQ1004

● plaster

DIRECT
LIGHT

Data sheet

CODE	XGQ1004
SYSTEM POWER CONSUMPTION	max 50W
LIGHT SOURCE	LED retrofit / halogen
LIGHT SOURCE KIT	not included
COMPATIBLE SOURCES	max 50W GU10
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
WEIGHT	0,46 Kg
PROTECTION DEGREE	IP20
PACKING DIMENSIONS	21,0 x 27,0 x 14,0 cm



Lighting fixture for ceiling or wall built-in installation for interiors, with direct light emission.

Total built-in plaster structure for masonry or plasterboard.


Light source retaining spring clip in stainless steel.

Fixing brackets in micro-perforated sheet metal.

Recessed housing for masonry in galvanized sheet metal to be ordered separately.

Built-in hole dimension: 125x125mm (4,9x4,9")

Technical drawing

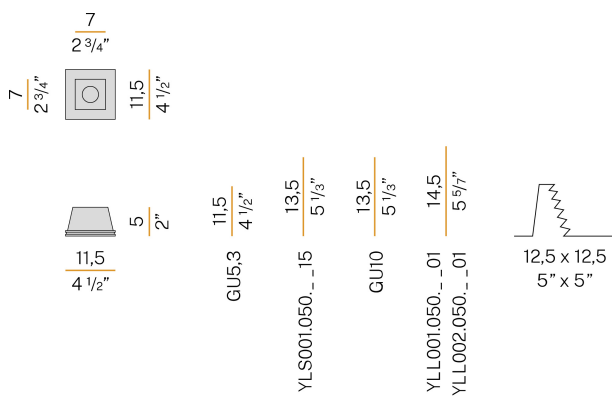

Application



PANZERI

East

Accessories / source

YLL001.050.2201 PAR16 LED lamp GU10 7,5W 220-240V AC 3000K Ra>80 608lm 60°, not dimmable, white colour.



YLL002.050.2201 PAR16 LED lamp GU10 7,5W 220-240V AC 3000K Ra>80 608lm 60°, not dimmable, black colour.



YLS001.050.1715 LED lamp 8,5W 250mA 35V 2700K Ra>90 806lm 35°.



YLS001.050.2515 LED lamp 8,5W 250mA 35V 3000K Ra>90 854lm 35°.



YLS001.050.2915 LED lamp 8,5W 250mA 35V 4000K Ra>90 1053lm 35°.




PANZERI

East

Accessories / power supply


XM6-15 UNI

LED driver, 2,5÷15W 60÷360mA.




XM6-20 D/P MULTI

LED driver, 9,2÷28W 200÷900mA, 1-10V/DALI/Push DIM dimmable.



XM6-25 D/P MULTI

LED driver, 11÷25,6W 200÷900mA, DALI/Push DIM dimmable.



PANZERI

East

Accessories / connection

XM2

GU5,3 lampholder, cable and terminal block kit.



PANZERI

East

Accessories / fixing

XM1004/1004-GL/1030 Galvanized sheet housing to be recessed in brick wall or concrete.

