PANZERI

Gonio

Data sheet

SYSTEM POWER CONSUMPTION

CODE

EFFICACY

LIGHT SOURCE

COLOUR TEMPERATURE

ELECTRICAL CONFIGURATION

NOMINAL LUMINOUS FLUX

LIGHT DISTRIBUTION

POWER SUPPLY

LUMEN OUTPUT

PROTECTION DEGREE

COLOUR TOLLERANCES

PACKING DIMENSIONS

EFFICIENCY

WEIGHT

FREQUENCY

DRIVER

220-240V AC dimmable (DALI/Push DIM) A01901.030.0502

A01901.030.0502

26W

LED

83.38lm/W

2700K Ra>90

asymmetric

220-240V AC

dimmable (DALI/Push DIM)

integrated included

50/60Hz

3120lm

2168lm


69.5%

1,08 Kg

IP40

SDCM 3

19,5 x 35,0 x 10,0 cm

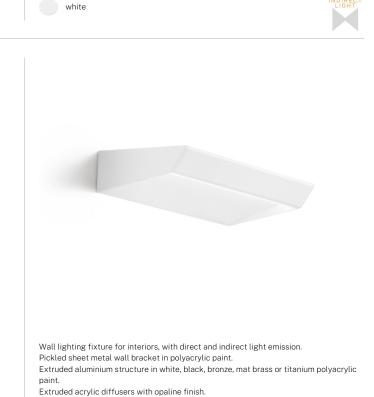

C€ ER[X

Technical drawing





14,5 5 5/7"

Polar diagram

Die-cast aluminium end caps in polyacrylic paint.

