

ART

Ceiling mounted luminaires

design Roberto Mantovani



The Art range of surface-mounted fixtures, equipped with 24VDC COB LEDs with high luminous performances, combines minimal geometry with a high level of mechanical and optical quality. Made of anodised aluminium, they are suitable for installation in particularly aggressive environments.

La gamma di apparecchi a plafone Art, equipaggiati con COB LED alimentati a 24VDC dalle alte prestazioni luminose, combina una geometria minimale ad una qualità meccanica ed ottica di alto livello. Realizzati in alluminio anodizzato, sono idonei all'installazione in ambienti particolarmente aggressivi.

La gamme d'appareils à plafond Art, équipés avec COB LED alimentés à 24VDC aux prestations lumineuses élevées, combine une géométrie minimale à une qualité mécanique et optique de haut niveau. Réalisés en aluminium anodisé, ils sont adaptés pour l'installation dans des milieux particulièrement agressifs.



IP65 made in Italy

Die Geräte des Sortiments plafoneArt sind mit 24VDC COB-LEDs mit hoher Lichtleistung ausgestattet und eine minimale Geometrie ist mit hoher mechanischer und optischer Qualität kombiniert. Hergestellt aus eloxiertem Aluminium, eignen sie sich für den Einbau in besonders aggressiven Umgebungen.

La gama de luminarias de techo Art, equipadas con COB LED alimentadas a 24VDC de alto rendimiento luminoso, combina una geometría minimalista con una alta calidad mecánica y óptica. Realizados en aluminio anodizado, son adecuados para la instalación en ambientes especialmente agresivos.

Supply current


24VDC

Power


7W

Parallel wiring

Dimensions



Photometric diagrams

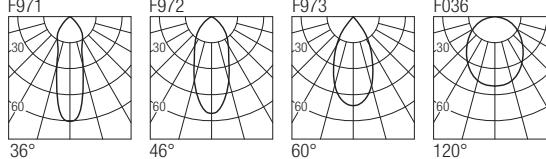


CCT/CRI/Flux

	CRI85 2700K 3000K 4000K	CRI93 590lm 650lm 670lm

Code construction

AT1 X X X X

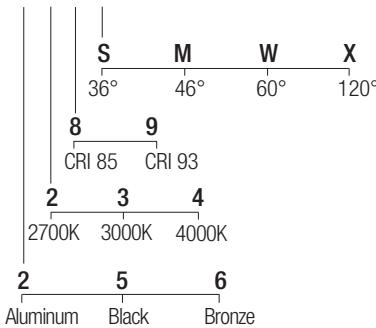

Note: cable cut to measure on request

Options

L0D1

Low luminance louver



Note: the filter must be ordered together with the lighting fixture

Drivers

24 VDC

IP20

IP67

Dimming module

AL2012 (1..3) 60mm	AL9212 (1..2) 110mm	AL7035 IP20 PUSH 1..10V DALI
AL2031 (1..10) 70mm	AL9231 (1..10) 85mm	
AL2040 (1..21) 80mm	AL9240 (1..21) 85mm	

Note: dimming module AL7035 to be used in combination with a 24VDC power supply