

# PANZERI

## Brooklyn Round


220-240V AC dimmable (DALI/Push DIM)

L23102.180.0402




### Data sheet

CODE	L23102.180.0402
SYSTEM POWER CONSUMPTION	29W
EFFICACY	51.14lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 80.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (DALI/Push DIM)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	3420lm
LUMEN OUTPUT	1483lm
EFFICIENCY	43.4%
WEIGHT	1,89 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS	12,0 x 110,0 x 55,0 cm




Suspension lighting fixture for interiors, with direct light emission. Banded extruded aluminium structure in white, black or mat brass polyacrylic paint. Extruded polycarbonate diffuser with opaline finish. Galvanized sheet metal end caps in polyacrylic paint. Suspension kit with griplocks and 2m (78,7") long steel cables. 2,2m (86,6") long power cable in transparent PVC. Power canopy with pickled sheet metal ceiling bracket and covering in white polyacrylic paint.

### Technical drawing

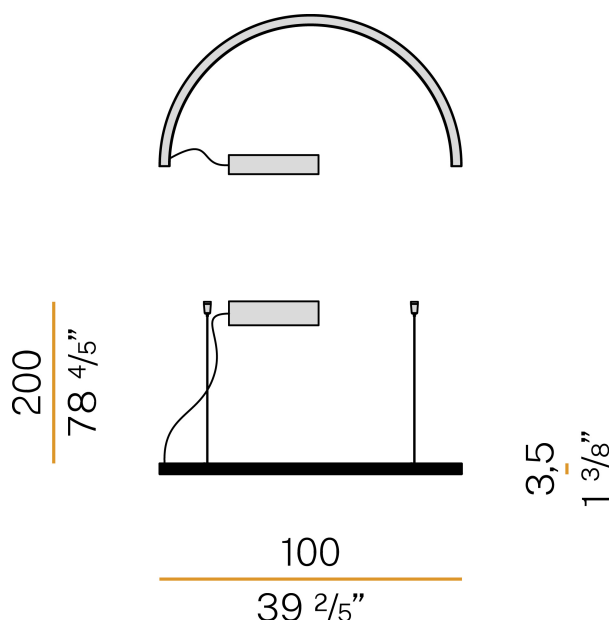

### Polar diagram

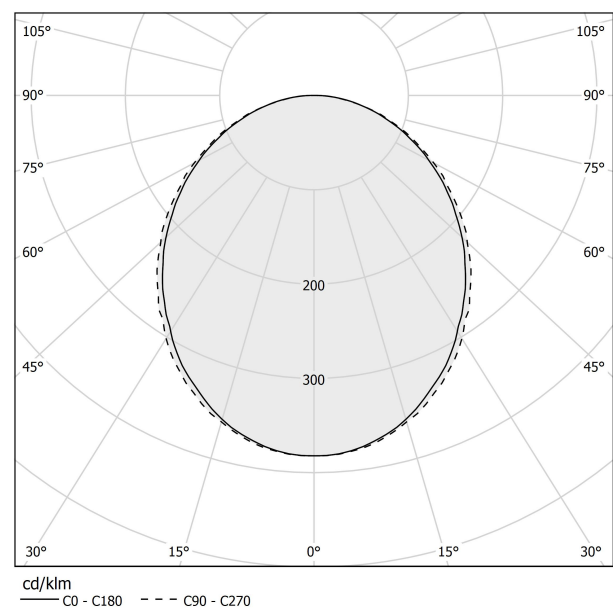


# PANZERI

## Brooklyn Round

### Accessories / power supply


XM150/24 DIM

LED driver, 150W 24V DC, DALI/Push DIM dimmable.



XM60/24 DIM

LED driver, 60W 24V DC, DALI/Push DIM dimmable.




# PANZERI

## Brooklyn Round

### Accessories / power supply and fixing

XM23102.538.0099

Canopy for power supply with 8 outputs and to join 7 steel cables, for up to 8 Brooklyn Round models maximum.



# PANZERI

## Brooklyn Round

### Accessories / fixing

---

XM231/23202L

Plate for multiple suspensions.

