## EDGE 560 **7385** sku 1352001

# astro



### PRODUCT SPECIFICATION

#### GENERAL

| FINISH:                   | White                            | CABLE LENGTH:              | Not Applicable                            |
|---------------------------|----------------------------------|----------------------------|---|
| MAIN MATERIAL:            | Metal - Mild Steel               | GROSS WEIGHT:              | 4.0 (kg)                                  |
| DIMENSIONS:               | H: 206mm W: 562mm D: 54mm        | CLASS:                     | CE (Class I)                              |
| INSTALLATION ORIENTATION: | Wall Mount - Horizontal/Vertical | IP RATING:                 | IP20                                      |
| CUT OUT HOLE:             | Not Applicable                   | BATHROOM ZONE:             | Zone 3                                    |
| RECESS DEPTH:             | Not Applicable                   | VOLTAGE:                   | Mains 230V                                |
| FIRE RATING:              | Not Applicable                   | PRODUCT F MARK:            | Suitable for mounting on flamable materia |
| LAMP                      |                                  |                            |   |
| LIGHT SOURCE:             | Mid-Power LED                    | MACADAM ELIPSE:            | 3-Step                                    |
| MAXIMUM WATTAGE:          | 1 x 12.8W                        | UGR:                       | Not Applicable                            |
| MAXIMUM LAMP LENGTH:      | Not Applicable                   | BEAM ANGLE:                | Not Applicable                            |
| LAMP INCLUDED?            | Yes (Integral)                   | TILT ADJUSTMENT ANGLE:     | Not Applicable                            |
| LUMINOUS FLUX:            | 396.14 (Im)                      | ROTATION ADJUSTMENT ANGLE: | Not Applicable                            |
| COLOUR TEMP:              | 3000 (K)                         | AVERAGE LIFESPAN:          | 60,000 (Hrs)                              |
| CRI:                      | 85                               | L70:                       | To Be Advised                             |
| R9:                       | To Be Advised                    |                            |   |
| ELECTRICAL                |                                  |                            |   |
| SWITCHED:                 | No                               | SUPPLY FREQUENCY:          | Not Applicable                            |
| DIMMABLE:                 | Yes                              | DRIVER/BALLAST VOLTAGE:    | Not Applicable                            |
| DIMMING METHOD:           | Control Gear Dependant           | DRIVER AVERAGE LIFESPAN:   | Not Applicable                            |
| DRIVER OUTPUT CURRENT:    | Not Applicable                   | EFFICACY:                  | To Be Advised                             |
| DRIVER OUTPUT VOLTAGE:    | Not Applicable                   | DRIVER INCLUDED?           | No  |


#### ADDITIONAL INFORMATION



BOX QUANTITY X6

Œ

## PRODUCT ELEVATIONS

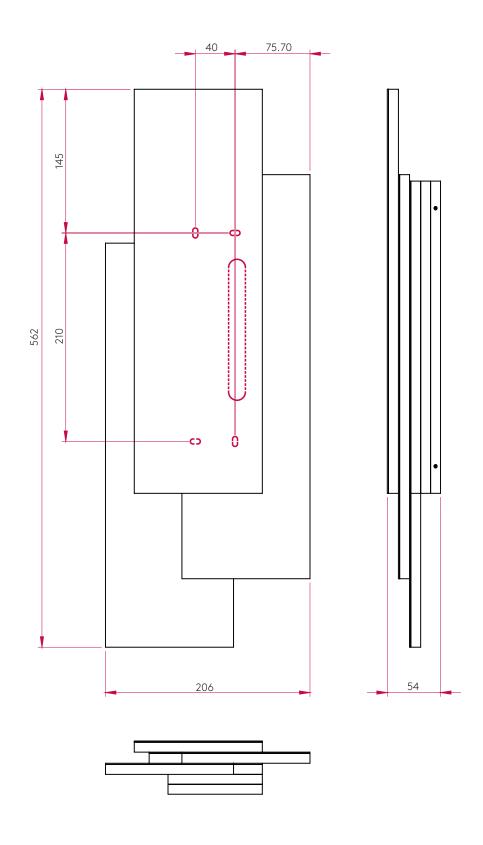

Astro Lighting Ltd. G2 River Way, Harlow, CM20 2DP, Great Britan T: +44 (0) 1279 427001 F: +44 (0) 1279 427002 sales@astrolighting.co.uk www.astrolighting.co.uk