Bella

24V DC

M05219.011.0510





Data sheet

CODE	M05219.011.0510
SYSTEM POWER CONSUMPTION	4,5W
EFFICACY	97lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B10) 70.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	460lm
LUMEN OUTPUT	388lm
EFFICIENCY	84.3%
WEIGHT	0,22 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	13,0 x 24,0 x 12,0 cm











Multiple suspension lighting fixture for interiors, with direct light emission. $\label{eq:decomposition} \mbox{Die-cast aluminium structure in white, black, bronze, mat brass or titanium polyacrylic}$ paint.

Modelled acrylic diffuser with mat finish.


Aluminium closing disk in polyacrylic paint.


Suspension kit with rod in brass tube in polyacrylic paint.

3m (118,1") long suspension and power cable in transparent PVC.


Provided without power canopy, complete with cable clamp on the cable's free extremity.

Technical drawing






Polar diagram



Bella

Accessories / power supply

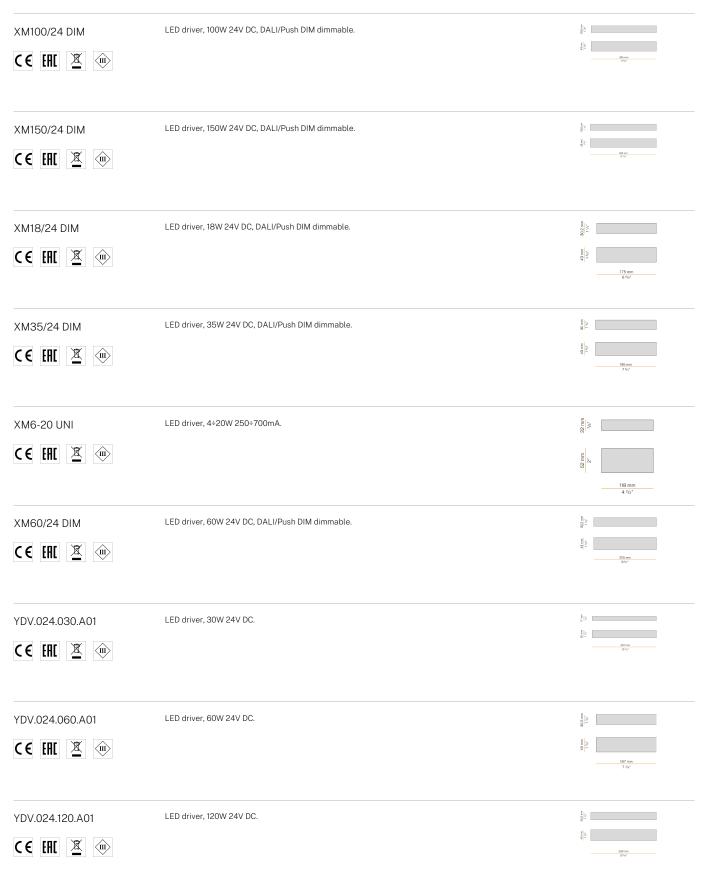

Bella

Accessories / power supply

YDV.024.180.A01


LED driver, 180W 24V DC.





Bella

Accessories / power supply and fixing

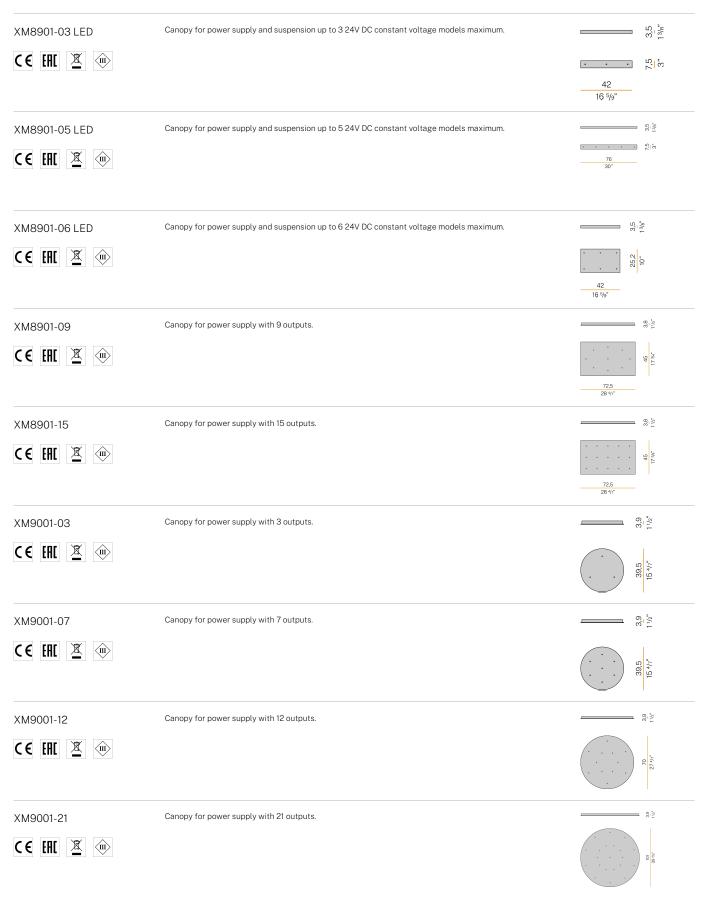

Bella

Accessories / power supply and fixing

XM9201-01

C € [HI 🗵 🐵

Recessed canopy for electric cable suspensions. Suitable for 24V fixtures: remote driver 24V needed.



Bella

Accessories / diffusion

YPL05207.015

C € EHI 🗵 🐽

Ivory pleated fabric lampshade, simple snap installation.







