

PANZERI

Birdcage

220-240V AC dimmable (DALI)
6LXBCLLB30GOB




Data sheet

CODE	6LXBCLLB30GOB
SYSTEM POWER CONSUMPTION	60W
EFFICACY	75lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 > 50.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (DALI)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	9000lm
LUMEN OUTPUT	4500lm
EFFICIENCY	50%
WEIGHT	0,00 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	0,0 x 0,0 x 0,0 cm



Suspension lighting fixture for interiors, with direct light emission.
Aluminium and galvanized sheet metal structure in black powder paint.
Modelled acrylic diffuser with opaline finish.
Sound absorbing PET covers in charcoal, dark blue, light blue, light grey or orange colour with sound absorption Class D for reducing up to 45% of reverberated sound (NRC 0,45) and fire rating Group 1 ISO 9705.
Suspension kit with griplocks and 3m (118,1") long steel cables.
3m (118,1") long power cable in black plastic.
Power canopy with turned aluminium ceiling plate and covering in black powder paint.

Technical drawing

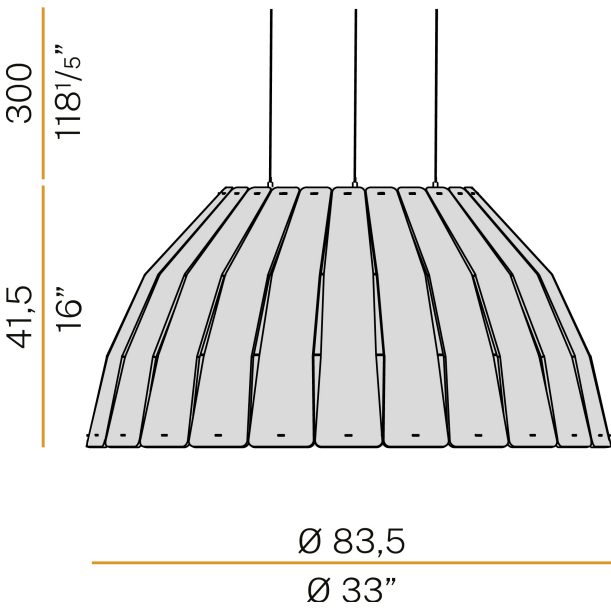

Polar diagram

