

# DRY




## INCASSO QUADRATO A PARETE, MINIMO INGOMBRO.


Creare percorsi luminosi ricchi di stile, valorizzare gli ambienti, enfatizzare dettagli: Dry, apparecchio da interni a scomparsa totale in AirCoral® per installazione in parete di cartongesso o laterizio, è la soluzione perfetta per chi vuole illuminare i propri spazi, prestando un'attenzione particolare al design e all'eleganza.

## SQUARE RECESSED WALL FITTING, MINIMUM DIMENSIONS.

Creating stylish light paths, enhancing rooms, highlighting details: Dry, a totally disappearing luminaire made of AirCoral®, installable on plasterboard or brick walls, is the perfect solution to light spaces up, with particular attention to design and elegance.

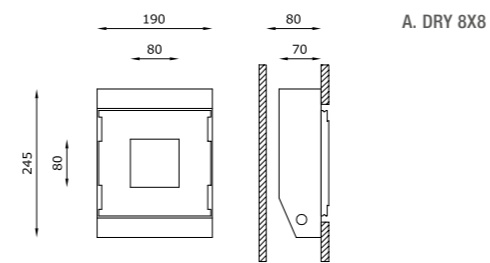

A. DRY 8X8

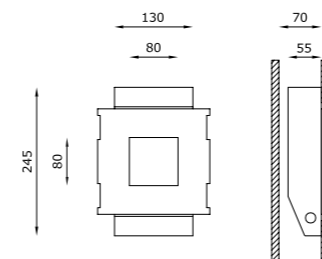

B. DRY MICRO 8X8  
for minimal dimensions



### TECHNICAL FEATURES

Code	6111.AC (fig. A)	6112.AC (fig. A)	6113.Z.AC (fig. A)	6121.AC (fig. B)	6122.AC (fig. B)
Type	Wall recessed 45°	Wall recessed 90°	Wall recessed 90°	Wall recessed 45°	Wall recessed 90°
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	2.53 m²	2.53 m²	2.53 m²	2.53 m²	2.53 m²
Weight	1.5 Kg	1.5 Kg	1.5 Kg	1.3 Kg	1.3 Kg
Mounting	Wall recessed	Wall recessed	Wall recessed	Wall recessed	Wall recessed
IP rating	IP40	IP40	IP40	IP40	IP40
Insulation class	III	III	III	III	III
Control gear	Dimmable electronic transformer	Dimmable electronic transformer	Constant current electronic driver	Dimmable electronic transformer	Dimmable electronic transformer
Cut out for plasterboard	195 x 185 mm	195 x 185 mm	195 x 185 mm	195 x 185 mm	195 x 185 mm
Lamp type	QR CB 51	QR CB 51	LED 500 mA	QR CB 35	QR CB 35
Lamp wattage	1 x 50W max	1 x 50W max	1 x 9W	1 x 35W max	1 x 35W max
Luminous efficacy	-	-	1125 lm - 3000K	-	-
Light distribution	-	-	Wide beam 40°	-	-
Fitting	GU5.3	GU5.3	-	GU4	GU4
Light colour	-	-	White 3000K White 2700K   4000K (on request)	-	-
Light hole	80 x 80 mm	80 x 80 mm	80 x 80 mm	80 x 80 mm	80 x 80 mm
Voltage connection	220-240V / 12V · 50/60Hz	220-240V / 12V · 50/60Hz	220-240V · 50/60Hz	220-240V / 12V · 50/60Hz	220-240V / 12V · 50/60Hz
CRI	-	-	>90	-	-
Emergency	-	-	-	-	-
Energy efficiency class	A	A	A++	A	A
Note	Extra white satin glass fixed by clip on wall level.	Extra white satin glass fixed by clip on wall level.	Extra white satin glass fixed by clip on wall level. On request available dimmable PUSH or DALI.	Extra white satin glass fixed by clip on wall level.	Extra white satin glass fixed by clip on wall level.

### OPTIONAL ACCESSORIES

product code	optional code	description	info
6111.AC / 6112.AC	0008KIT	Kit LED dimmable	Bulb 7W - 12V

\* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²