

# UNDERScore



## TECNOCEMENTO INTERRABILE.


Underscore è una perfetta unione di concetti e forme. Apparecchio per esterni in DurCoral® con grado di protezione IP68, capace di garantire una perfetta resistenza meccanica in caso di umidità e usura da agenti esterni.

Una linea di luce, un fascio che definisce i percorsi in maniera variabile in base alla tipologia di installazione; il prodotto, infatti, può avere un'altezza di 200 mm se tenuto a superficie, ma che offre la possibilità di essere modificata fino ad uno sviluppo verticale fuori terra di 80 mm, nel caso in cui l'apparecchio fosse interrato.

## TECHNO-CEMENT WHICH CAN BE BURIED IN THE GROUND.

*Underscore is the perfect combination of concepts and shapes. This outdoor device made of DurCoral®, with IP68 protection scale, provides impeccable mechanical resistance to humidity and external agents.*

*A boundary of light, a beam that marks paths in many different ways, depending on the type of installation; in fact, the product can be 200 mm (7.87") high when placed on the surface, but it can also be vertically extended by 80 mm (3.15"), when the device is underground.*

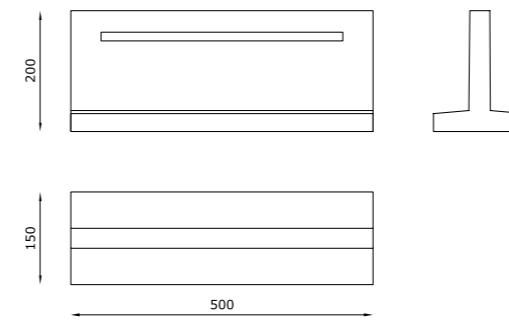

## CODE COMPOSITION

1751.DC

## TECHNICAL FEATURES

Code	<b>1751.DC</b>
Type	Ground lamp
Material	DC: DurCoral®
Weight	11 Kg
Mounting	Ground lamp
IP rating	IP68
Insulation class	III
Control gear	Remote constant voltage driver (not included)
Lamp type	LED 24V
Lamp wattage	1 x 5.5W
Luminous efficacy	40 lm/W - 3000K
Light distribution	Wide beam 120°
Fitting	-
Light colour	White 3000K
Light hole	400 x 15 mm
Voltage connection	By driver (optional)
CRI	90
Emergency	-
Energy efficiency class	A++
Note	On request available dimmable PUSH or DALI, remote installation.



## OPTIONAL ACCESSORIES

product code	optional code	description	info
1751.DC	H8024.D	Constant voltage driver. Remote installation	Suitable for n°3 code 1751.DC - 24V





SUPERFUTUREDESIGN™