



402701-02-03-04

## GRAZER

Linear wall mounted luminaire for outdoor installation for façade/wall grazing, length 500 mm or 1.000mm.

Anodized extruded copper-free aluminium body, tempered safety glass, moulded silicone gasket and stainless steel screws.

Remote 24V DC driver needed, with 9 to 36 CREE LED.


IP66 rating.


### Technical features




### Technical data

|               |   |
|---------------|---|
| IP Rating     | IP66  |
| IK Rating     | IK08  |
| Material      | Extruded aluminum   |
| Remote driver | Constant voltage 24V DC   |
| Gasket        | Silicone rubber   |
| Glass         | Tempered  |
| Power cable:  | Input and output power cable for loop-in/loop-out installation, supplied with male and female connector |

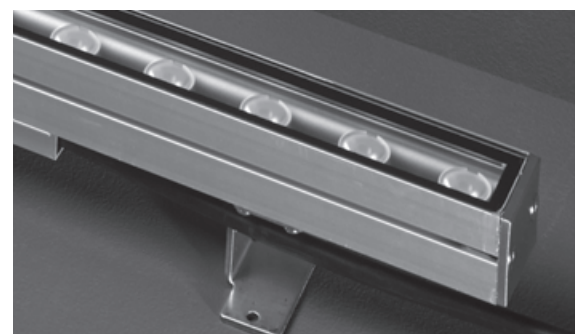


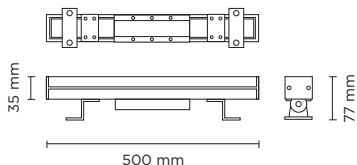


| 402701                      |  | GRAZER-9 500      |
|-----------------------------|--|-------------------|
| light source                | light beam options                     | lumen output (lm) |
| <b>3000°K warm-white</b>    |  |                   |
| high-power led              | 8° / 20° / 30° / 60° / 15x30° / 10x60° | 700               |
| <b>4000°K neutral-white</b> |  |                   |
| high-power led              | 8° / 20° / 30° / 60° / 15x30° / 10x60° | 720               |

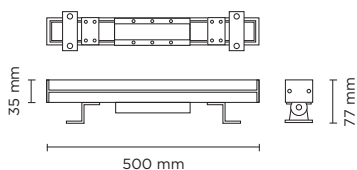

| 402702                      |  | GRAZER-18 500     |
|-----------------------------|--|-------------------|
| light source                | light beam options                     | lumen output (lm) |
| <b>3000°K warm-white</b>    |  |                   |
| high-power led              | 8° / 20° / 30° / 60° / 15x30° / 10x60° | 1.400             |
| <b>4000°K neutral-white</b> |  |                   |
| high-power led              | 8° / 20° / 30° / 60° / 15x30° / 10x60° | 1.440             |

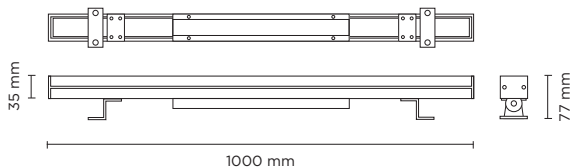


| 402703                      |  | GRAZER-18 1000    |
|-----------------------------|--|-------------------|
| light source                | light beam options                     | lumen output (lm) |
| <b>3000°K warm-white</b>    |  |                   |
| high-power led              | 8° / 20° / 30° / 60° / 15x30° / 10x60° | 1.400             |
| <b>4000°K neutral-white</b> |  |                   |
| high-power led              | 8° / 20° / 30° / 60° / 15x30° / 10x60° | 1.440             |

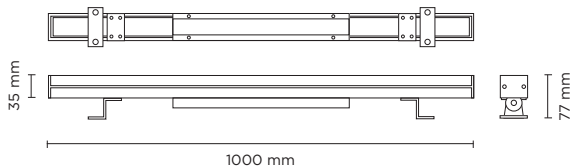

| 402704                      |  | GRAZER-36 1000    |
|-----------------------------|--|-------------------|
| light source                | light beam options                     | lumen output (lm) |
| <b>3000°K warm-white</b>    |  |                   |
| high-power led              | 8° / 20° / 30° / 60° / 15x30° / 10x60° | 2.820             |
| <b>4000°K neutral-white</b> |  |                   |
| high-power led              | 8° / 20° / 30° / 60° / 15x30° / 10x60° | 2.880             |


#### Technical data

|              |                |
|--------------|----------------|
| Wattage      | 9 WATT         |
| Voltage      | 24V DC         |
| Length       | 500 mm         |
| Light source | Nr. 9 CREE LED |
| Gross weight | 2,00 Kg        |

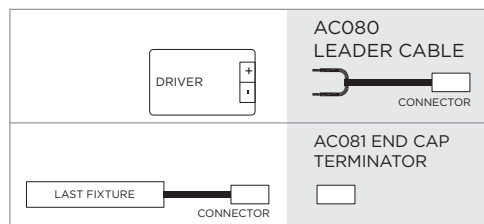


#### Technical data

|              |                 |
|--------------|-----------------|
| Wattage      | 18 WATT         |
| Voltage      | 24V DC          |
| Length       | 500 mm          |
| Light source | Nr. 18 CREE LED |
| Gross weight | 2,00 Kg         |

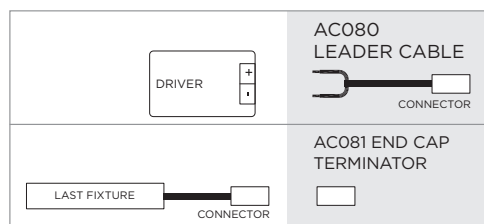

#### Technical data

|              |                 |
|--------------|-----------------|
| Wattage      | 18 WATT         |
| Voltage      | 24V DC          |
| Length       | 1.000 mm        |
| Light source | Nr. 18 CREE LED |
| Gross weight | 3,00 Kg         |

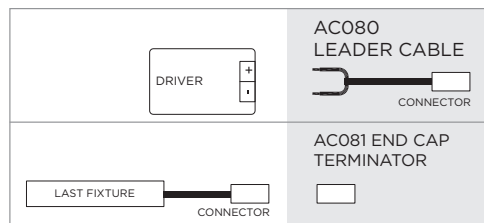

#### Technical data

|              |                 |
|--------------|-----------------|
| Wattage      | 36 WATT         |
| Voltage      | 24V DC          |
| Length       | 1.000 mm        |
| Light source | Nr. 36 CREE LED |
| Gross weight | 3,00 Kg         |