

101805-06-07-08

LIGHTBEAM RGBW / TUNABLE WHITE

Projector for outdoor installation. phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, tempered safety glass, moulded silicone gasket and stainless steel screws. With 18 to 60 OSRAM RGBW LED, available as 24V (remote power supply needed) or 220-240V (built-in power supply), DMX interface. IP66 rating.



Technical features




Technical data

IP Rating	IP66
IK Rating	08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	OSRAM OSOLON SSL 80 LED
Screws	Stainless steel
Transformer	Built-in or remote, as per customer preference
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. power cable included



101805 LIGHTBEAM-18 RGBW

light source	light beam options	lumen output (lm)
RGBW		
high-power led	8° / 15° / 30° / 45° / 60° / 15x60° / 20x40°	2.206
Tunable white		
high-power led	8° / 15° / 30° / 45° / 60° / 15x60° / 20x40°	2.758

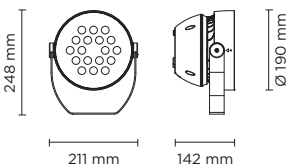


Technical data

Wattage	36 WATT
Light source	NR. 18 OSRAM LED
Gross weight	2,60 Kg




101806 LIGHTBEAM-30 RGBW

light source	light beam options	lumen output (lm)
RGBW		
high-power led	8° / 15° / 30° / 45° / 60° / 15x60° / 20x40°	3.989
Tunable white		
high-power led	8° / 15° / 30° / 45° / 60° / 15x60° / 20x40°	4.986

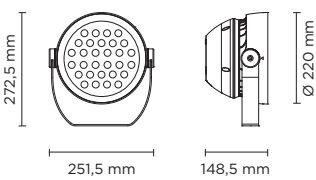


Technical data

Wattage	60 WATT
Light source	NR. 30 OSRAM LED
Gross weight	5,20 Kg



101807 LIGHTBEAM-48 RGBW

light source	light beam options	lumen output (lm)
RGBW		
high-power led	8° / 15° / 30° / 45° / 60° / 15x60° / 20x40°	5.124
Tunable white		
high-power led	8° / 15° / 30° / 45° / 60° / 15x60° / 20x40°	6.405

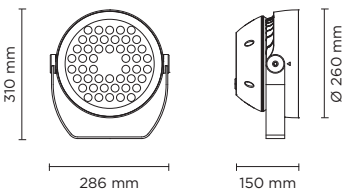


Technical data

Wattage	100 WATT
Light source	NR. 48 OSRAM LED
Gross weight	7,30 Kg



101808 LIGHTBEAM-60 RGBW

light source	light beam options	lumen output (lm)
RGBW		
high-power led	8° / 15° / 30° / 45° / 60° / 15x60° / 20x40°	9.906
Tunable white		
high-power led	8° / 15° / 30° / 45° / 60° / 15x60° / 20x40°	12.383

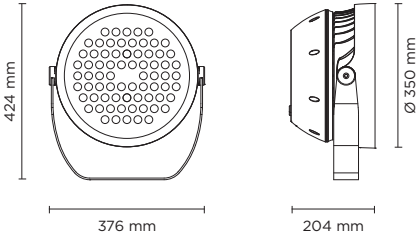

Technical data

Wattage	150 WATT
Light source	NR. 60 OSRAM LED
Gross weight	13,50 Kg

