



- Circular recessed trimless LED downlight
- Anodized aluminium body machined from solid in 6082 alloy and aluminum ring with polyester powder paint resistant to corrosion
- Beam angles 20° 30° 48° 86°
- Available with transparent or frost diffuser glass
- Fixing with screws
- IP67 external power supply included
- IP68 connector for the connection between projector and power supply included
- Maximum permissible ambient temperature +50° C for the 5W, 10W and 14W versions, +35° C for the 19W and 25W versions

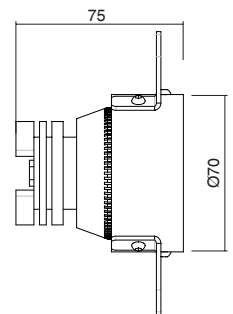

- *Proiettore LED da incasso trimless circolare*
- *Corpo in alluminio anodizzato tornito dal pieno lega 6082 ed anello in alluminio con verniciatura in polvere di poliestere resistente alla corrosione*
- *Angoli del fascio 20° 30° 48° 86°*
- *Disponibile con vetro diffusore trasparente oppure frost*
- *Fissaggio con viti*
- *Alimentatore esterno IP67 incluso*
- *Connettore IP68 per la connessione fra proiettore ed alimentatore incluso*
- *Temperatura ambiente massima ammissibile +50° C per le versioni da 5W, 10W e 14W, +35° C per le versioni da 19W e 25W*







IP65

Lamp / Lampada 1 LED COB CREE	Input / Alimentazione 220/240V 50/60Hz	Power / Potenza 5 / 10 / 14 / 19 / 25W	Color Tolerance/ Tolleranza Cromatica 2-SDCM / 3-SDCM	CRI / CRI 80 MIN
-------------------------------------	--	--	---	------------------------



NEXO LUCE (Factory)  
Strada Mirabella, 10  
46040 Cavriana (MN), ITALY  
T +39 0376 771513 F +39 0376 772235  
sales@nexoluce.com www.nexoluce.com

Made in Italy

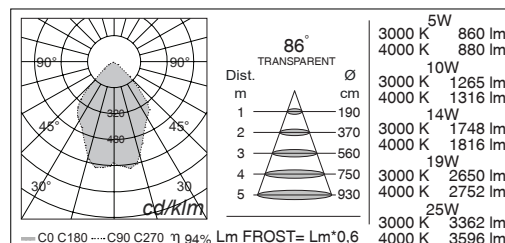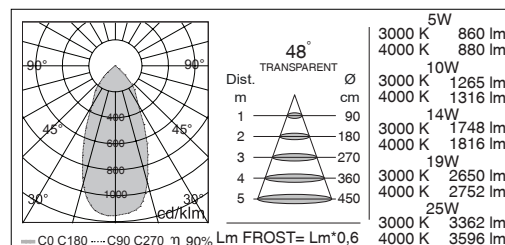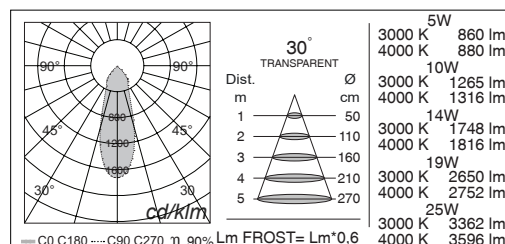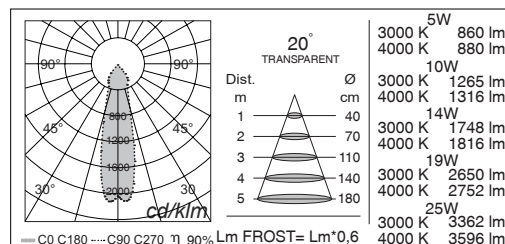

MAIN CODE CODICE BASE	RELEASE EDIZIONE	LIGHT COLOR COLORE LUCE	WATT WATT	OPTIC OTTICA	CONTROL CONTROLLO	FRAME COLOR COLORE
<b>2639</b>	<b>.1</b>	<b>B</b> 3000K	<b>.05</b> 5W	<b>.D</b> 20° (TRANSPARENT)	<b>1</b> ON/OFF	<b>BS</b> WHITE / BIANCO
		<b>C</b> 4000K	<b>.10</b> 10W	<b>.F</b> 30° (TRANSPARENT)	<b>8</b> DIMMER 1-10V	<b>BT</b> BLACK/ NERO
		* others on request / altri su richiesta	<b>.14</b> 14W	<b>.I</b> 48° (TRANSPARENT)		
			<b>.19</b> 19W	<b>BZ</b> 86° (TRANSPARENT)		
			<b>.25</b> 25W	<b>CT</b> 20° FROST		
				<b>CU</b> 30° FROST		
				<b>CV</b> 48° FROST		
				<b>CZ</b> 86° FROST		

CODE EXAMPLE : Projector with warm white light color at 3000K, 10W, 20° optic, ON/OFF control, white color  
2639.1B.10.D1BS

ESEMPIO DI CODIFICA : Proiettore con luce calda a 3000K, 10W, ottica 20°, controllo ON/OFF, colore bianco  
2639.1B.10.D1BS

NEXO LUCE (Factory)  
Strada Mirabella, 10  
46040 Cavriana (MN), ITALY  
T +39 0376 771513 F +39 0376 772235  
sales@nexoluce.com www.nexoluce.com

Made in Italy