


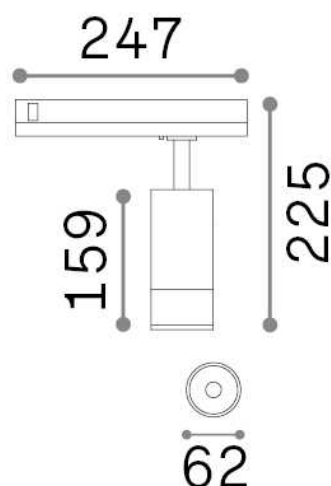

## General info

### Technical - Spotlights and Tracks

|              |                       |
|--------------|-----------------------|
| Ean          | 8021696302997         |
| Item         | EOS 15W 3000K DALI WH |
| Installation | Spotlights and Tracks |
| Guarantee    | 5 years               |
| Gross weight | 0.75 kg               |
| Volume       | 0.0042 m <sup>3</sup> |

## Technical info

|                          |                                      |
|--------------------------|--------------------------------------|
| Net weight               | 0.66 kg                              |
| Insulation class         | II                                   |
| Protection index         | IP20                                 |
| Compliance               | CE                                   |
| Operating temperature    | 0° ~ +40 °C                          |
| Dimmer                   | 1, DALI                              |
| Power output             | 220-240 V AC 50/60 Hz                |
| Power supply             | In-built, included<br>NO, electronic |
| Adjustability            | vert. 0°-90° , orizz. 0°-355°        |
| Accessories not included | Link 1-10V/DALI profile              |

## Source info

|                        |                                           |
|------------------------|-------------------------------------------|
| Integrated source      | Integrated LED module                     |
| Replaceable source     | Replaceable (by qualified operators only) |
| Power                  | 15 W                                      |
| Emission               | Direct                                    |
| Max consupcion         | max 15,00 W                               |
| Features LED           | LED COB BRIDGELUX                         |
| CCT LED                | 3000 K                                    |
| Duration LED (t. 25°c) | 30000 h                                   |
| CRI                    | > 90                                      |
| SDCM                   | 3                                         |
| Light beam             | 20-55°                                    |
| Light beam flux        | 1550 lm                                   |
| Useful light flux      | 1400 lm                                   |
| Photobiological risk   | 1                                         |
| Standby power          | < 0.50 W                                  |