

PANZERI

Jackie Spot

220-240V AC ON-OFF
B07701.000.0101

● white



Data sheet


CODE	B07701.000.0101
SYSTEM POWER CONSUMPTION	8,5W
EFFICACY	102.5lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L90 (B10) 50.000h
COLOUR TEMPERATURE	3000K Ra>80
LIGHT DISTRIBUTION	adjustable
BEAM ANGLE	90°
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	1027lm
LUMEN OUTPUT	820lm
EFFICIENCY	79.8%
WEIGHT	0,66 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	16,0 x 39,0 x 16,0 cm



Lighting fixture for electrified track for interiors, with swivelling light beam.
Pickled sheet metal bracket in polyacrylic paint.
Die-cast aluminium structure in white, black, red or titanium polyacrylic paint.
Die-cast aluminium head rotating on two axes in polyacrylic paint.
Modelled acrylic diffuser with mat finish and double serigraphy.
Equipped with electric and mechanical adapter for three-phase electrified tracks.




Technical drawing

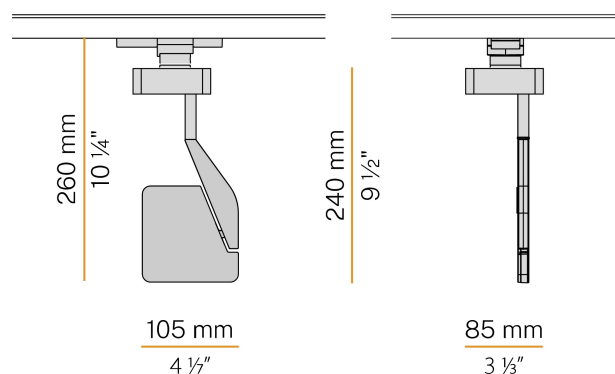

Application



Polar diagram

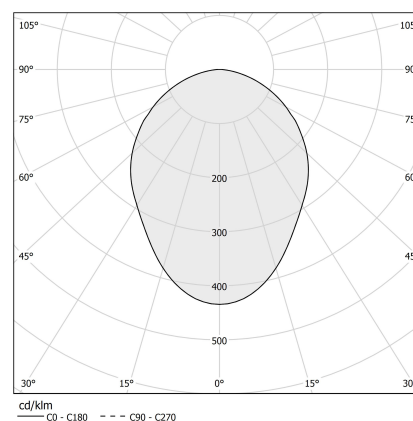

PANZERI


Jackie Spot

Accessories / electrified tracks

XM7501-100




Three-phase electrified track for suspended or ceiling installation for interiors. Structure in anodized extruded aluminium or with white or black powder paint. Copper conductors housed inside extruded section bars in PVC with high isolation resistance. 230-250V AC line voltage or 380-440V AC industrial line voltage power supply. 16A total electrical load. Fastening, joining and closing accessories to be ordered separately. Length: 1m (39,4")



XM7501-200




Three-phase electrified track for suspended or ceiling installation for interiors. Structure in anodized extruded aluminium or with white or black powder paint. Copper conductors housed inside extruded section bars in PVC with high isolation resistance. 230-250V AC line voltage or 380-440V AC industrial line voltage power supply. 16A total electrical load. Fastening, joining and closing accessories to be ordered separately. Length: 2m (78,7")



XM7501-300



Three-phase electrified track for suspended or ceiling installation for interiors. Structure in anodized extruded aluminium or with white or black powder paint. Copper conductors housed inside extruded section bars in PVC with high isolation resistance. 230-250V AC line voltage or 380-440V AC industrial line voltage power supply. 16A total electrical load. Fastening, joining and closing accessories to be ordered separately. Length: 3m (118,1")



PANZERI

Jackie Spot

Accessories / electrified tracks / adapters


XM7501

Electro/mechanical adapter 6A, mechanical load 5kg, for three-phase electrified track.



XM76B01

Mechanical adapter with automatic locking for three-phase electrified track.




PANZERI

Jackie Spot

Accessories / electrified tracks / power supply and closing


XM76ADX01

Right live-end for three-phase electrified track.



XM76ASX01

Left live-end for three-phase electrified track.




PANZERI

Jackie Spot

Accessories / electrified tracks / power supply and junction

XM76A01

Central connector and straight joint for three-phase electrified track.




PANZERI

Jackie Spot

Accessories / electrified tracks / closing


XM76C01

Cover 1000mm (39,4") long for three-phase electrified track.



XM76E01

End cap for three-phase electrified track.




PANZERI

Jackie Spot

Accessories / electrified tracks / fixing


XM76K

Ceiling kit for three-phase electrified track.



XM76S01

Suspension kit with 2m (78,7") long steel wire and plate for three-phase electrified track.




PANZERI

Jackie Spot

Accessories / electrified tracks / junction

XM76F01

Flexible joint for three-phase electrified track.




XM76LE01

External "L" joint for three-phase electrified track.




XM76LI01

Internal "L" joint for three-phase electrified track.




XM76M01

Mobile joint for three-phase electrified track.




XM76Q01

Electrical straight joint with stop for three-phase electrified track.




XM76TDX01

Right "T" joint for three-phase electrified track.




XM76TSX01

Left "T" joint for three-phase electrified track.



XM76U01

Mechanical straight joint for three-phase electrified track.



XM76X01

"X" joint for three-phase electrified track.

