

PANZERI

Kubik

220-240V AC ON-OFF
L07001.011.0401

● white




Data sheet

| | |
|--------------------------|-----------------------|
| CODE | L07001.011.0401 |
| SYSTEM POWER CONSUMPTION | 9,5W |
| EFFICACY | 59,1lm/W |
| LIGHT SOURCE | LED |
| LIGHT SOURCE LIFETIME | L80 (B20) 60.000h |
| COLOUR TEMPERATURE | 3000K Ra>90 |
| LIGHT DISTRIBUTION | diffused |
| POWER SUPPLY | 220-240V AC |
| FREQUENCY | 50/60Hz |
| ELECTRICAL CONFIGURATION | ON-OFF |
| DRIVER | integrated included |
| NOMINAL LUMINOUS FLUX | 861lm |
| LUMEN OUTPUT | 532lm |
| EFFICIENCY | 61,8% |
| WEIGHT | 1,76 Kg |
| PROTECTION DEGREE | IP40 |
| COLOUR TOLLERANCES | SDCM 3 |
| PACKING DIMENSIONS | 17,0 x 17,0 x 80,0 cm |



Suspension lighting fixture for interiors, with direct and indirect light emission. Pickled sheet metal structure in white polyacrylic paint. Diffuser in mat white blown glass. Suspension kit with telescopic rod in brass tube in polyacrylic paint. Power canopy with galvanized sheet metal ceiling bracket and pickled sheet metal covering in white polyacrylic paint.

Technical drawing

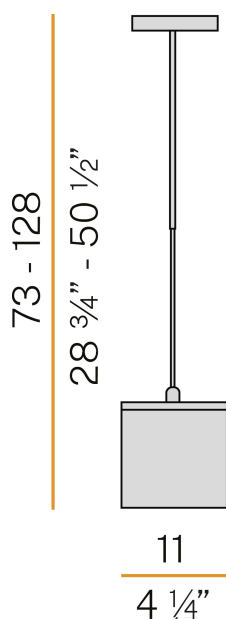

Polar diagram

