

# PANZERI

## Bella

220-240V AC dimmable (Step DIM)

X05202.011.0509

● black





### Data sheet

CODE	X05202.011.0509
SYSTEM POWER CONSUMPTION	5W
EFFICACY	77.6lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B10) 70.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	adjustable
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (Step DIM)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	460lm
LUMEN OUTPUT	388lm
EFFICIENCY	84.3%
WEIGHT	0,93 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	13,0 x 24,0 x 12,0 cm



### Technical drawing

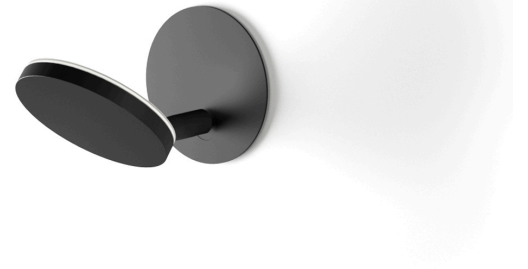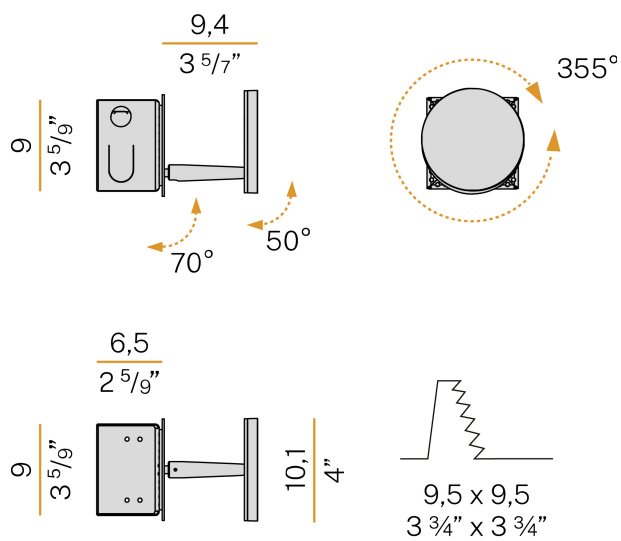

Lighting fixture for wall semi-built-in installation for interiors, with swivelling light beam.

- Pickled sheet metal fixing disk in white polyacrylic paint.
- Pickled sheet metal wall plate in white, black, bronze, mat brass or titanium polyacrylic paint.
- Turned brass joints in polyacrylic paint.
- Die-cast aluminium structure in polyacrylic paint.
- Die-cast aluminium head rotating on three axes in polyacrylic paint.
- Modelled acrylic diffuser with mat finish.
- Aluminium closing disk in polyacrylic paint.
- Push-button to adjust luminosity according to 5 levels of visual comfort.
- Recessed housing for masonry or plasterboard, in pickled sheet metal in polyacrylic paint.
- Pickled sheet metal brackets for plasterboard fixing.

Built-in hole dimension: 95x95mm (3,7x3,7")

### Application

