

INVISIBILE




INCASSO A PARETE E SOFFITTO CON VETRO A FILO.


Il nome evoca la caratteristica principale di questo apparecchio: Invisibile 10x10 è un apparecchio da interni in AirCoral®, un incasso per installazione in parete e soffitto di cartongesso o laterizio che si integra completamente con la superficie, raggiungendo uno straordinario risultato di scomparsa totale. Superficie e luce diventano così inscindibili, grazie anche alla presenza del vetro satinato, fissato con viti in policarbonato bianche e completamente a filo sia con il vetro che con il corpo.

WALL OR CEILING RECESSED FITTING WITH FLUSH GLASS.

Its name evokes the main feature of this product: Invisibile 10x10 is a totally disappearing indoor recessed luminaire made of AirCoral®, installable on plasterboard or brick walls and ceilings, perfectly blending into surfaces, achieving an extraordinary complete disappearance effect. Surface and light become inseparable also thanks to the presence of satin glass, fixed with screws in white polycarbonate which are placed right at the level of both the glass material and the body.



Recessed

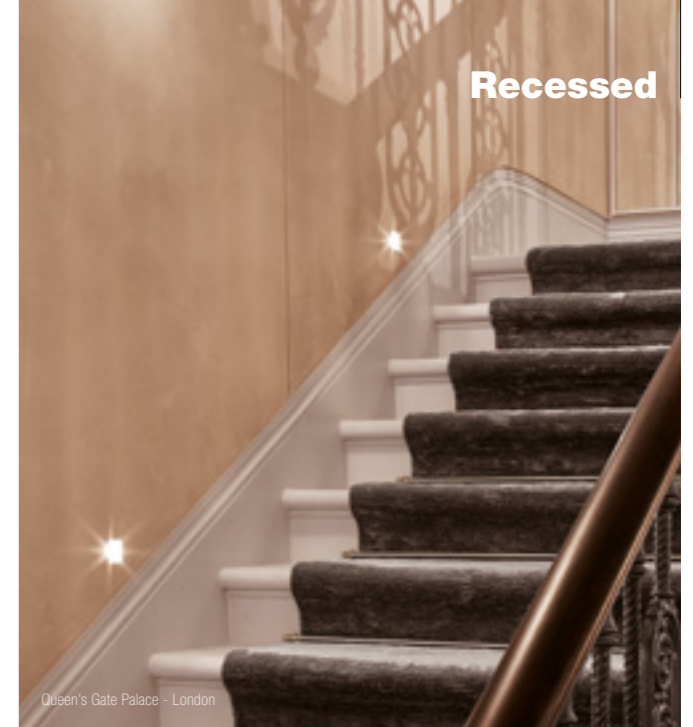

Queen's Gate Palace - London

TECHNICAL FEATURES

Code	6131.AC	6132.AC	6133.Z.AC	6139.Z.AC
Type	Downlight 45° Wall recessed 45° 	Downlight 90° Wall recessed 90° 	Downlight 90° Wall recessed 90° 	Downlight 90° Wall recessed 90°
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	2.3 m²	2.3 m²	2.3 m²	2.3 m²
Weight	1.5 Kg	1.5 Kg	1.5 Kg	2.5 Kg
Mounting	Wall and ceiling recessed	Wall and ceiling recessed	Wall and ceiling recessed	Wall and ceiling recessed
IP rating	IP40	IP40	IP40	IP40
Insulation class	III	III	III	III
Control gear	Dimmable electronic transformer	Dimmable electronic transformer	Constant current electronic driver	Constant current electronic driver
Dimensions	A: 190mm; B: 245mm; C: 70mm; D: 80mm	A: 190mm; B: 245mm; C: 70mm; D: 80mm	A: 190mm; B: 245mm; C: 70mm; D: 80mm	A: 190mm; B: 350mm; C: 70mm; D: 80mm
Cut out for plasterboard	195 x 185 mm	195 x 185 mm	195 x 185 mm	195 x 250 mm
Lamp type	QR CB 51 	QR CB 51 	LED 500 mA 	LED 500 mA
Lamp wattage	1 x 50W max	1 x 50W max	1 x 9W	1 x 9W
Luminous efficacy	-	-	1125 lm - 3000K	1125 lm - 3000K
Light distribution	-	-	Wide beam 40°	Wide beam 40°
Fitting	GU5.3	GU5.3	-	-
Light colour	-	-	White 3000K White 2700K 4000K (on request)	White 3000K White 2700K 4000K (on request)
Light hole	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm
Voltage connection	220-240V / 12V · 50/60Hz	220-240V / 12V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	-	-	>90	>90
Emergency	-	-	-	1 hour
Energy efficiency class	A	A	A++	A++
Note	Extra white satin glass fixed by screws on wall/ceiling level.	Extra white satin glass fixed by screws on wall/ceiling level.	Extra white satin glass fixed by screws on wall/ceiling level. On request available dimmable PUSH or DALI.	Extra white satin glass fixed by screws on wall/ceiling level.

OPTIONAL ACCESSORIES

product code	optional code	description	info
6131.AC / 6132.AC	0008KIT	Kit LED dimmable	Bulb 7W - 12V

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²