

MACAIA

Recessed optics downlights

design Roberto Mantovani



A range of 24VDC recessed lights that combines an extremely well-finished and minimal design with high visual comfort – the exceptionally small edge and embedded optics make it an innovative and effective element, ideal for applications extending from highlighting exhibition components or architectural details to general lighting. Can be fitted with an anti-glare filter for maximum visual comfort.

Una gamma di incassi a 24VDC che associa un design estremamente curato e minimale ad un elevato confort visivo: il bordo estremamente ridotto e l'ottica arretrata ne fanno un elemento innovativo ed efficace, ideale per applicazioni che spaziano dall'accento di elementi espositivi o di dettagli architettonici all'illuminazione generale. Equipaggiabili con filtro antiabbagliamento per il massimo comfort visuel.

Une gamme de spots 24VDC qui combine un design extrêmement précis et minimalistique avec un grand confort visuel: le bord extrêmement réduit et l'optique encastrée en font un élément innovant et efficace, parfaits pour des applications allant de l'accentuation d'éléments d'affichage ou de détails architecturaux à l'éclairage général. Peut être équipé de filtre anti-éblouissement pour le plus grand confort visuel.



IP44 made in Italy

Una gama de luminarias empotradas de 24VDC que combina un diseño extremadamente preciso y minimalista con un alto confort visual: el borde extremadamente reducido y la óptica hacia atrás la convierten en un elemento innovador y eficaz, ideal para aplicaciones que van desde la acentuación de elementos de exposición o detalles arquitectónicos hasta la iluminación general. Se puede equipar con un filtro antideslumbrante para un máximo confort visual.

Supply current


24 VDC

Power


2 W

Parallel wiring

Dimensions



Photometric diagrams

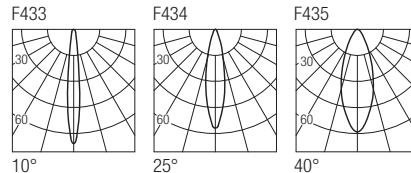


CCT/CRI/Flux

2700K	128lm
3000K	133lm
4200K	154lm

Code construction

MC1 X X X



Optionals

LMC101

Low luminance louver



Note: the filter must be ordered together with the lighting fixture

Drivers

24 VDC

on/off	dimming module	dimmable
AL2012 (1..10) 60mm IP20	AL7035 IP20 PUSH DALI 1..10V	AL5012 (1..10) 45mm IP20 PUSH DALI 1..10V
AL2031 (1..35) 70mm IP20		AL8012 (1..10) IP67 DALI
AL9212 (1..10) 110mm IP67		
AL9231 (1..35) 85mm IP67		

Note: dimming module AL7035 to be used in combination with a 24VDC power supply