


101901

# NANOSPOT MICRO HP

Projector for outdoor installation on a façade/wall. Body in anodized aluminum with phospho-chromatised and polyester powder coating, bracket in stainless steel, tempered safety glass, moulded silicone gasket and stainless steel screws. Constant voltage 24V DC remote driver needed. With 1 x XP-G3 CREE LED. IP66 rating.

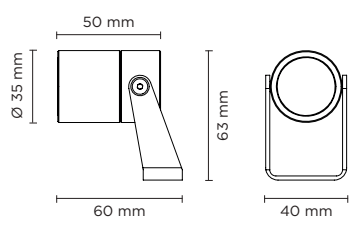

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>3000°K warm-white</b>			
high-power led	10°	250	83.33
high-power led	30°	240	80.00
high-power led	45°	230	76.66
<b>4000°K neutral-white</b>			
high-power led	10°	270	90.00
high-power led	30°	260	86.66
high-power led	45°	250	83.33

**Finish color options:**

- Textured Grey  
RAL 9006
- Anthracite Grey  
RAL 7016
- Matt Black  
(on request)

**Technical features**

IP66

IK09

CE

5  
YEARS

NEW

**Technical data**

Wattage	3 WATT
IP Rating	IP66
IK Rating	09
Material	Hard anodized aluminum
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	1 x CREE "XP-G3" LED
Screws	Stainless steel
Remote driver	Constant voltage 24V DC
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. power cable included
Gross weight	0,40 Kg

## OTHER VIEW




## OPTIONAL

AC044  
SPIKE



AC094  
HONEYCOMB LOUVER



AC038  
TREE STRAP



AC097  
ANTI-GLARE SNOOT



## ACCESSORIES

### AC100 PIPE L 300 mm

Extension pipe length 300 mm made in anodized aluminum with phospho-chromatised and polyester powder coating.

### AC101 PIPE L 600 mm

Extension pipe length 600 mm made in anodized aluminum with phospho-chromatised and polyester powder coating.

### AC102 PIPE L 900 mm

Extension pipe length 900 mm made in anodized aluminum with phospho-chromatised and polyester powder coating.



AC100

AC101

AC102

### remote driver selection

brand	manufacturer code	type	watt	IP rate	numbers of fixtures
Meanwell	LPV-20-24	constant voltage 24V DC	20W	IP67	min 1 - max 4
Meanwell	LPV-35-24	constant voltage 24V DC	35W	IP67	min 1 - max 7
Meanwell	LPV-60-24	constant voltage 24V DC	60W	IP67	min 1 - max 12



