

PANZERI

Flat


220-240V AC emergency
X07501.060.0407

● white



Data sheet


CODE	X07501.060.0407
SYSTEM POWER CONSUMPTION	48W
EFFICACY	61.04lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 60.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	emergency
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	5216lm
LUMEN OUTPUT	2930lm
EFFICIENCY	56.2%
DURATION IN EMERGENCY MODE	1h
WEIGHT	5,18 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	19,5 x 62,5 x 63,5 cm

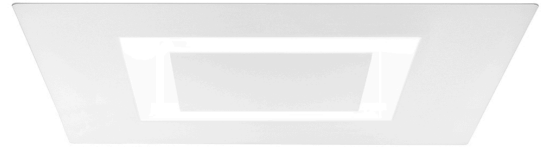

Lighting fixture for ceiling built-in installation for interiors, with direct light emission. Built-in bearing structure for modular false ceilings, in aluminium in polyacrylic paint. Pickled sheet metal closing frames in white polyacrylic paint. Modelled polycarbonate diffuser with opaline finish. Equipped with inspection flap to access the terminal block.



Technical drawing

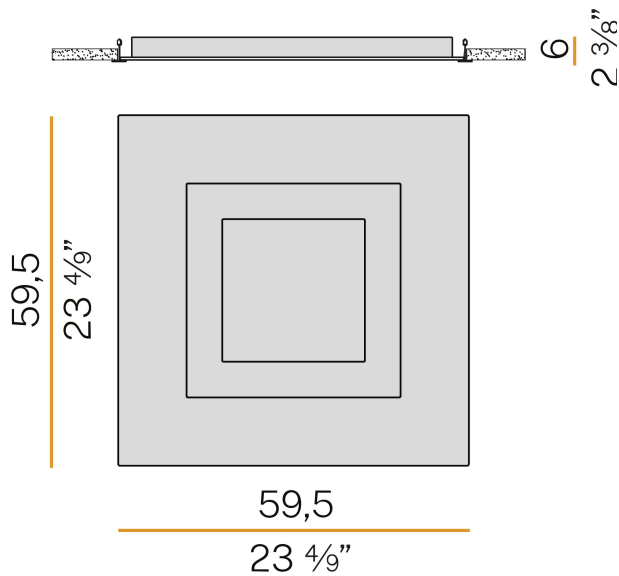

Polar diagram

