




101904

NANOSPOT MEDIUM COB

Projector for outdoor installation on a façade/wall. Body in anodized aluminum with phospho-chromatised and polyester powder coating, bracket in stainless steel, tempered safety glass, moulded silicone gasket and stainless steel screws. With 1 direct 220-240V LUMENS "EDC 57C" COB LED. IP66 rating.

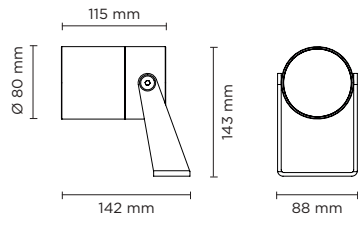

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
cob led	20°	1.000	66.67
cob led	40°	980	65.34
4000°K neutral-white			
cob led	20°	1.050	70.00
cob led	40°	1.030	68.67

Finish color options:

- Textured Grey
RAL 9006
- Anthracite Grey
RAL 7016
- Matt Black
(on request)

Technical features

IP66

IK09

CE

5
YEARS

⊕

NEW

Technical data

Wattage	15 WATT
IP Rating	IP66
IK Rating	09
Material	Hard anodized aluminum
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1 x LUMENS "EDC 57C" COB LED
Screws	Stainless steel
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. power cable included
Gross weight	1,50 Kg



OTHER VIEW




OPTIONAL

AC044
SPIKE



AC096
HONEYCOMB LOUVER



AC038
TREE STRAP



AC099
ANTI-GLARE SNOOT



AC100 **PIPE L 300 mm**


Extension pipe length 300 mm made in anodized aluminum with phospho-chromatised and polyester powder coating.

AC101 **PIPE L 600 mm**

Extension pipe length 600 mm made in anodized aluminum with phospho-chromatised and polyester powder coating.


AC102 **PIPE L 900 mm**

Extension pipe length 900 mm made in anodized aluminum with phospho-chromatised and polyester powder coating.



300 mm

AC100

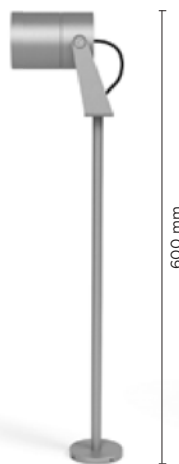

600 mm

AC101



900 mm

AC102



