To-be

24V DC

M02501.085.0510





Data sheet

| CODE | M02501.085.0510 |
|--------------------------|-----------------------|
| SYSTEM POWER CONSUMPTION | 2,8W |
| EFFICACY | 90.5lm/W |
| LIGHT SOURCE | LED |
| LIGHT SOURCE LIFETIME | L70 (B50) 60.000h |
| COLOUR TEMPERATURE | 2700K Ra>90 |
| LIGHT DISTRIBUTION | diffused |
| POWER SUPPLY | 24V DC |
| DRIVER | remote not included |
| NOMINAL LUMINOUS FLUX | 270lm |
| LUMEN OUTPUT | 181lm |
| EFFICIENCY | 67% |
| WEIGHT | 0,64 Kg |
| PROTECTION DEGREE | IP40 |
| COLOUR TOLLERANCES | SDCM 3 |
| PACKING DIMENSIONS | 5,0 x 105,0 x 10,0 cm |
| | |







Multiple suspension lighting fixture for interiors, with direct light emission. ${\sf Extruded\ aluminium\ structure\ in\ white,\ mat\ black,\ bronze\ or\ mat\ brass\ polyacrylic\ paint}$ or with gold leaf coating.

Extruded aluminium heat sink.


Modelled polycarbonate diffuser with opaline finish.

Turned brass end cap in polyacrylic paint.


5m (196,9") long suspension and power cable in transparent PVC.

Provided without power canopy, complete with cable clamp on the cable's free extremity.

Technical drawing



Polar diagram

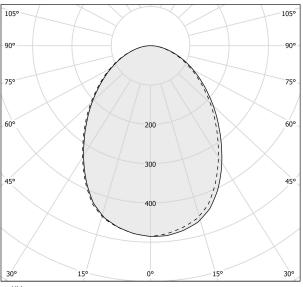

To-be

Accessories / power supply

| XM100/24 DIM C € [FHI] 🗵 🐽 | LED driver, 100W 24V DC, DALI/Push DIM dimmable. | |
|-------------------------------------|--|---|
| XM150/24 DIM C € [EHI] (2) (10) | LED driver, 150W 24V DC, DALI/Push DIM dimmable. | |
| XM18/24 DIM C € [EHI] 🗵 瞰 | LED driver, 18W 24V DC, DALI/Push DIM dimmable. | |
| XM35/24 DIM C € [HI] 🗵 🐽 | LED driver, 35W 24V DC, DALI/Push DIM dimmable. | |
| XM6-20 UNI C € EHI © | LED driver, 4÷20W 250÷700mA. | 18 mm |
| XM60/24 DIM C € [FRI] [X] (m) | LED driver, 60W 24V DC, DALI/Push DIM dimmable. | 4 2/s* |
| YDV.024.030.A01 [C € [EHI] [图] [⑩] | LED driver, 30W 24V DC. | \$\frac{1}{2} \rightarrow \frac{1}{2} \rightarrow \frac |
| YDV.024.060.A01 C € [HI] 🗵 🐽 | LED driver, 60W 24V DC. | 1/2 2 2 2 2 2 2 2 2 2 |
| YDV.024.120.A01 C € [EHI] 🗵 瞰 | LED driver, 120W 24V DC. | |

To-be

Accessories / power supply

YDV.024.180.A01


LED driver, 180W 24V DC.





To-be

Accessories / power supply and fixing

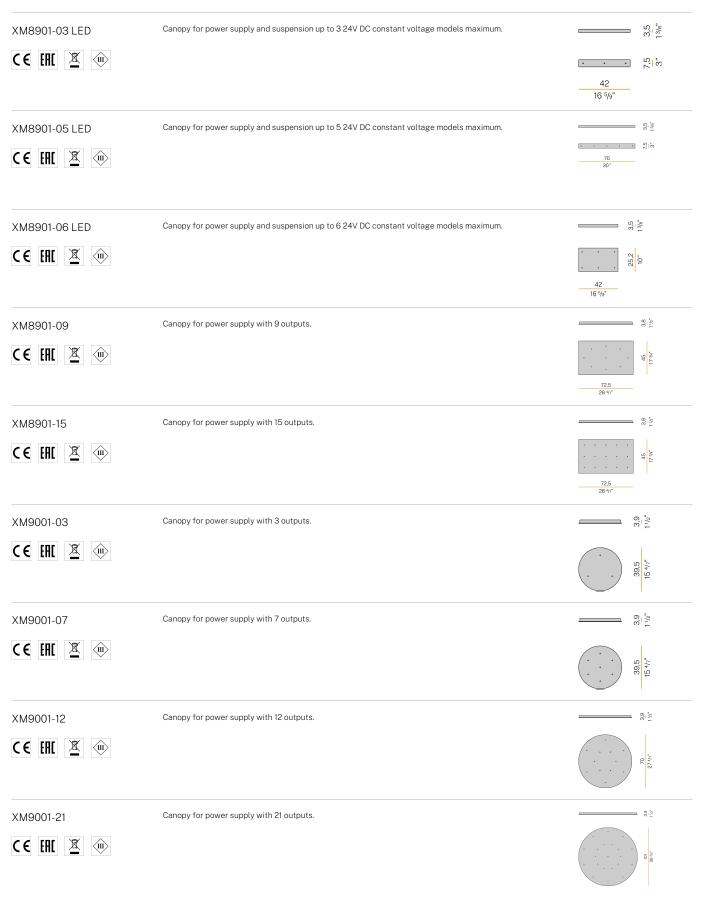

To-be

Accessories / power supply and fixing

XM9201-01

C € [HI 🗵 🐵

Recessed canopy for electric cable suspensions. Suitable for 24V fixtures: remote driver 24V needed.



To-be

Accessories / fixing

C € EHI 🗵 🐽

M800

Polycarbonate hook for suspension.







