



- Drive-over circular LED sidelight
- Anodized aluminium body machined from solid in 6082 alloy
- Brushed stainless steel frame AISI 316L
- Plexiglass diffuser
- Silicone gaskets
- IP67 external power supply included
- IP68 connector for the connection between projector and power supply included
- IP68 male ad female connectors and neoprene cable for connection extension (between projector and power supply) accessories available on request
- Housing for installation D80X120MM or cylindrical D38X150MM (recommended for remote power supply) available as an accessory
- Maximum permissible ambient temperature + 50°C



- *Proiettore LED circolare a pozzetto carrabile ad emissione laterale*
- *Corpo in alluminio anodizzato tornito dal pieno lega 6082*
- *Cornice esterna in acciaio inox AISI 316L spazzolata*
- *Diffusore in plexiglass*
- *Guarnizioni in silicone*
- *Alimentatore esterno IP67 incluso*
- *Connettore IP68 per la connessione fra proiettore ed alimentatore incluso*
- *Connettori IP68 maschio e femmina e cavo in neoprene per prolunga connessione (fra proiettore ed alimentatore) accessori disponibili su richiesta*
- *Controcassa per installazione D80X120MM oppure cilindrica D38X150MM (consigliata per alimentatore remoto) disponibile come accessorio*
- *Temperatura ambiente massima ammissibile +50°C*

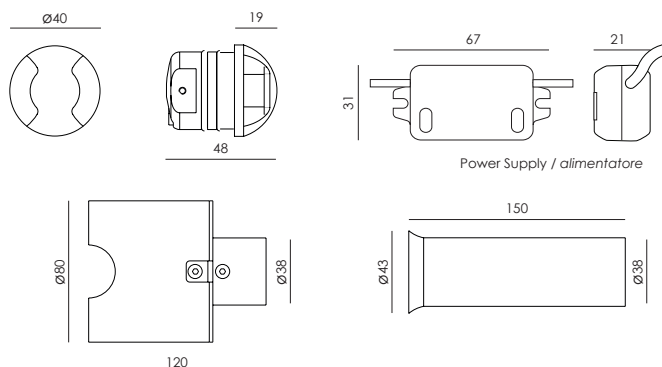

Housing D80x120MM available as an accessory / controcassa D80X120MM disponibile come accessorio cod. 003.0251.0

Cylindrical housing for remote power supply available as an accessory / controcassa cilindrica per alimentatore remoto disponibile come accessorio cod. 003.0204.H




Lamp / Lampada	Input / Alimentazione	Power / Potenza	Color Tolerance / Tolleranza Cromatica	CRI / CRI
PCB 1 LED CREE	220/240V 50/60Hz	1,5 / 3 W	2-SDCM / 3-SDCM	80 MIN




NEXO LUCE (Factory)
 Strada Mirabella, 10
 46040 Cavriana (MN), ITALY
 T +39 0376 771513 F +39 0376 772235
 sales@nexoluce.com www.nexoluce.com

Made in Italy

© Nexo Luce, a company incorporated in Italy. The logo and the name are the property of Nexo Luce SRL. The present datasheet and its content in whole or in part are the property of Nexo Luce SRL. All rights reserved. We reserve the right to change details and specifications without prior written notice.



AJ






AL



*IP68 CONNECTORS ON REQUEST
*CONNETTORI IP68 SU RICHIESTA
code: 003.0223.0



*2x0.35 H05RN-F CABLE (1 meter) ON REQUEST
*CAVO 2X0.35 H05RN-F (1 metro) SU RICHIESTA
code: 003.0224.0

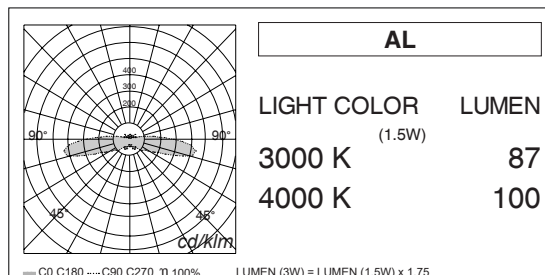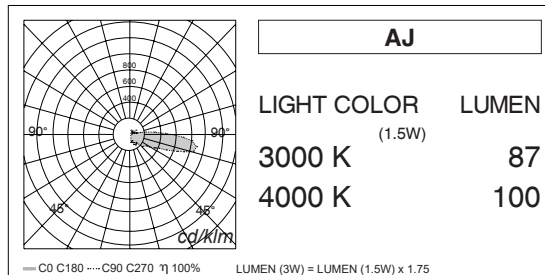

MAIN CODE CODICE BASE	RELEASE EDIZIONE	LIGHT COLOR COLORE LUCE	WATT WATT	OPTIC OTTICA	CONTROL CONTROLLO	FRAME COLOR COLORE
2640	.2	B 3000K	.01 1.5W	AJ 1 SIDE BEAM	1 ON/OFF	.G STAIN. STEEL / INOX
		C 4000K	.03 3W	AL 2 BEAMS 180°		
		* others on request / altri su richiesta				

CODE EXAMPLE : Projector type 1 side beam
with warm white light color at 3000K, 1.5W,
ON/OFF control, frame in stainless steel
2640.2B.01AJ1.G

ESEMPIO DI CODIFICA : Proiettore a singola
emissione, luce calda a 3000K, 1.5W,
controllo ON/OFF, in acciaio inox
2640.2B.01AJ1.G

NEXO LUCE (Factory)
Strada Mirabella, 10
46040 Cavriana (MN), ITALY
T +39 0376 771513 F +39 0376 772235
sales@nexoluce.com www.nexoluce.com

Made in Italy