

PANZERI

Flat

220-240V AC dimmable (DALI/Push DIM)


P07501.051.0402

● white



Data sheet


CODE	P07501.051.0402
SYSTEM POWER CONSUMPTION	48W
EFFICACY	61.04lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 60.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (DALI/Push DIM)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	5216lm
LUMEN OUTPUT	2930lm
EFFICIENCY	56.2%
WEIGHT	5,24 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	19,5 x 62,5 x 63,5 cm

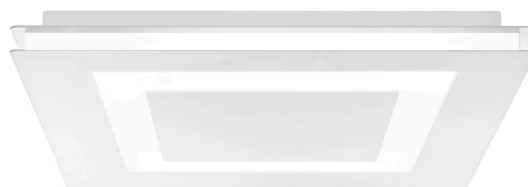

Ceiling or wall lighting fixture for interiors, with direct light emission.
Pickled sheet metal ceiling/wall bracket in polyacrylic paint.
Aluminium dissipation plate.
Pickled sheet metal closing frames in white polyacrylic paint.
Modelled polycarbonate diffuser with opaline finish.



Technical drawing

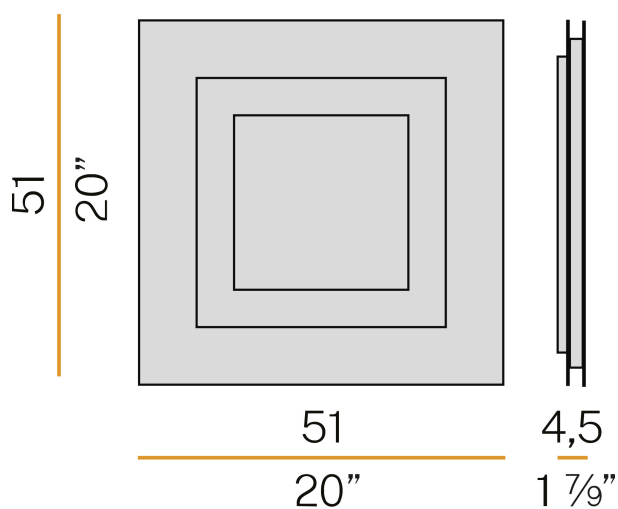

Application



Polar diagram

