

# PANZERI

## Joe

220-240V AC

ST.XA2116

● white




### Data sheet

CODE	ST.XA2116
SYSTEM POWER CONSUMPTION	max 50W
LIGHT SOURCE	LED retrofit / halogen
LIGHT SOURCE KIT	not included
COMPATIBLE SOURCES	max 50W GU10
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
WEIGHT	0,12 Kg
PROTECTION DEGREE	IP20
PACKING DIMENSIONS	10,5 x 8,5 x 10,5 cm



Lighting fixture for ceiling built-in installation for interiors, with direct light emission.  
Built-in structure for permanent false ceilings, in turned aluminium in polyacrylic paint.  
Die-cast aluminium closing frame in white polyacrylic paint.  
Light source retaining spring clip in stainless steel.  
Stainless steel spring clips for false ceiling fixing.  
Built-in hole dimension:  $\varnothing 90\text{mm}$  ( $\varnothing 3,5''$ )

### Technical drawing

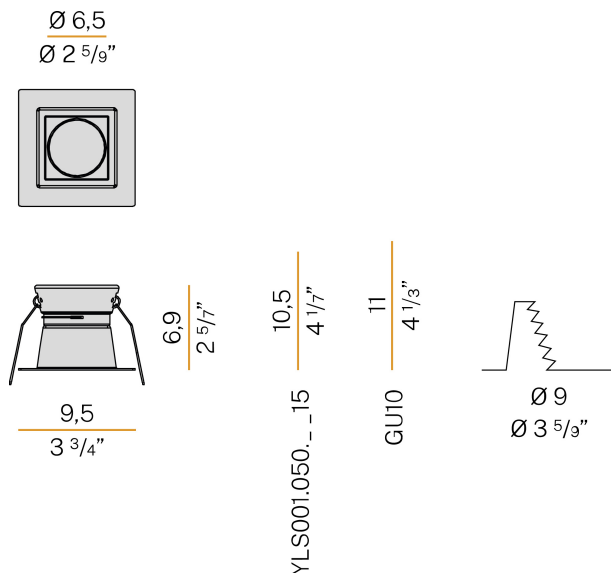

### Application



# PANZERI

Joe

## Accessories / source

---

YLS001.050.1715 LED lamp 8,5W 250mA 35V 2700K Ra>90 806lm 35°.



---

YLS001.050.2515 LED lamp 8,5W 250mA 35V 3000K Ra>90 854lm 35°.



---

YLS001.050.2915 LED lamp 8,5W 250mA 35V 4000K Ra>90 1053lm 35°.





# PANZERI

Joe

## Accessories / power supply


XM6-15 UNI

LED driver, 2,5÷15W 60÷360mA.



XM6-20 D/P MULTI

LED driver, 9,2÷28W 200÷900mA, 1-10V/DALI/Push DIM dimmable.



XM6-25 D/P MULTI

LED driver, 11÷25,6W 200÷900mA, DALI/Push DIM dimmable.

