

# TWIN GENIUSQUARE



DOPPIA EFFICIENZA LUMINOSA DA 2 FORI DI SOLI 20 x 20 mm.

Geniusquare si duplica e diventa Twin Geniusquare, apparecchio da interni a scomparsa totale in AirCoral® per installazione a soffitto di cartongesso o laterizio, garantendo un'intensità luminosa incredibile. Il doppio foro di emissione della luce di soli 20 mm permette al prodotto di integrarsi perfettamente con le superfici, raggiungendo straordinari effetti di scomparsa totale e garantendo una luminosità perfetta in ogni ambiente in cui viene installato.


La parte elettrica è estraibile direttamente dal foro luce con un semplice gesto della mano, grazie alla meccanica push-pull, che facilita l'eventuale estrazione e la sostituzione della sorgente LED in caso di manutenzione.

DOUBLE LIGHT EFFICIENCY FROM 2 HOLES OF ONLY 20 x 20 mm.

Geniusquare duplicates itself becoming Twin Geniusquare, a totally disappearing recessed luminaire in AirCoral® installable on plasterboard or brick ceilings and guaranteeing an incredible light intensity.

The double light-emission hole, which is only 20mm wide, allows the product to perfectly integrate itself with the surfaces it is installed on, adding extraordinary effects of total disappearance and offering a flawless light suitable for any environments.

With a simple hand gesture, the electric part can be extracted directly from the hole which allows the light to pour out. This is possible thanks to the push-pull mechanism, which makes the eventual extraction and replacement of the LED source easier in case of maintenance.

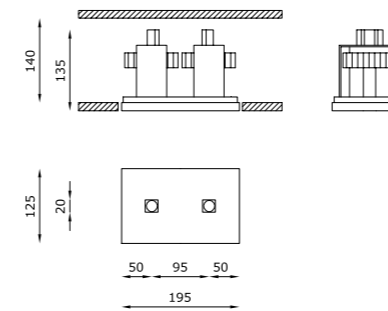

## TECHNICAL FEATURES

Code	1854.AC	1858.AC
Type	Downlight 90° 	Downlight 90° 
Material	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	2.78 m²	2.78 m²
Weight	2 Kg	2 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver and inverter
Cut out for plasterboard	205 x 135 mm	205 x 135 mm
Lamp type	LED 700 mA ⚡ V <sub>f</sub> : 2 x 11.5 VDC	LED 700 mA ⚡
Lamp wattage	2 x 8.5W	2 x 8.5W
Luminous efficacy	2 x 1000 lm - 3000K	2 x 1000 lm - 3000K
Light distribution	Wide beam 40°	Wide beam 40°
Fitting	-	-
Light colour	White 3000K White 2700K   4000K (on request)	White 3000K White 2700K   4000K (on request)
Light hole	20 x 20 mm	20 x 20 mm
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	1 hour
Energy efficiency class	A++	A++
Note	On request available dimmable PUSH or DALI, remote installation.	On request available dimmable PUSH or DALI, remote installation.

## OPTIONAL ACCESSORIES

product code	optional code	description	info
1854.AC	H8700.E	Constant current electronic driver. Remote installation	Suitable for n°1 code 1854.AC - 700 mA
	BR1854LT	Brick box	Dimensions L: 290 mm; W: 140 mm; D: 160 mm (instructions on page 502)
1858.AC	BR1858LT	Brick box	Dimensions L: 290 mm; W: 140 mm; D: 160 mm (instructions on page 502)

\* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²

