

# PANZERI

## Giano


220-240V AC ON-OFF  
A24646.100.0401

 white/opal screen




### Data sheet

CODE	A24646.100.0401
SYSTEM POWER CONSUMPTION	38W
EFFICACY	64.63lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 60.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	4560lm
LUMEN OUTPUT	2456lm
EFFICIENCY	53.9%
WEIGHT	2,60 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	14,0 x 141,0 x 14,0 cm

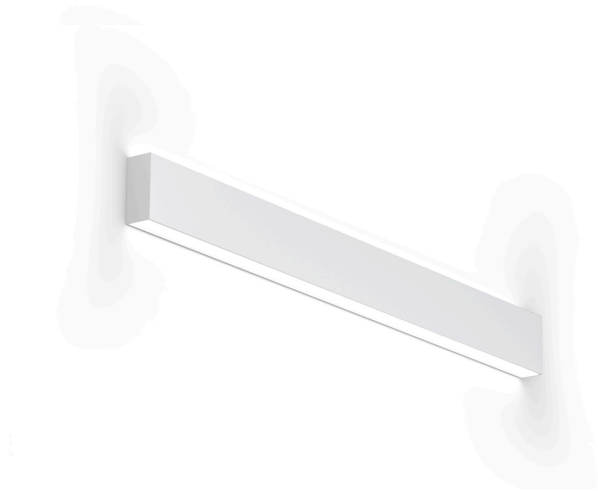

Wall lighting fixture for interiors, with direct and indirect light emission. Extruded aluminium structure in RAL 9003 white or black powder paint. Extruded polycarbonate diffusers with opaline finish. Pickled sheet metal end caps in polyacrylic paint. Equipped with wiring for separate switches for direct only, indirect only or direct and indirect light emission.

### Technical drawing

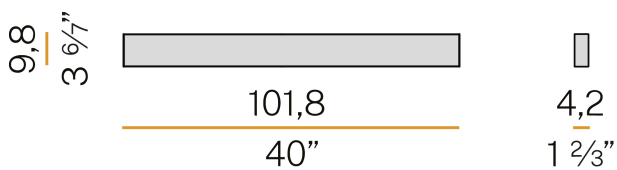

### Polar diagram

