


# PANZERI

## Two

220-240V AC ON-OFF


P03821.000.0406

 gold leaf

DIRECT  
LIGHT


### Data sheet

CODE	P03821.000.0406
SYSTEM POWER CONSUMPTION	10W
EFFICACY	59.5lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 50.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	850lm
LUMEN OUTPUT	595lm
EFFICIENCY	70%
WEIGHT	0,39 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	12,0 x 24,0 x 13,0 cm

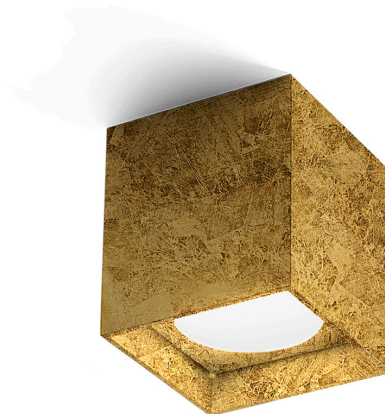


Ceiling lighting fixture for interiors, with direct light emission.  
Pickled sheet metal ceiling bracket in white, black, bronze, mat brass or gold polyacrylic paint.  
Extruded aluminium structure in white, black, bronze or mat brass polyacrylic paint, or with gold leaf coating.  
Aluminium dissipation plate.  
Flat frosted glass diffuser.  
Pickled sheet metal frame in white, black, bronze or mat brass polyacrylic paint, or with gold leaf coating.

### Technical drawing

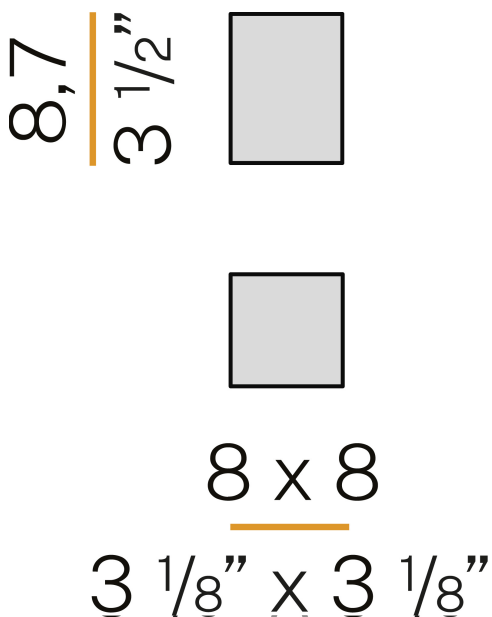

### Polar diagram

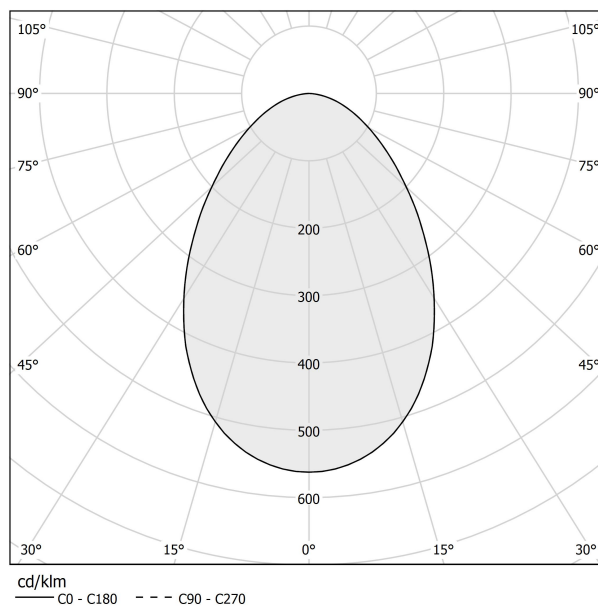

# PANZERI

Two

## Accessories / dimming

XM14/230

Dimmable device for 230V LED modules, 5÷100W.

