



- Track mounted LED projector
- Aluminium body machined from solid in 6082 alloy with polyester powder paint resistant to corrosion
- Tempered, extraclear, anti-glare safety glass with grinded edges
- Beam angles 20° 30° 48° 86°
- Adjustable pan and tilt movements
- Power supply integrated in the track adapter
- Compatible with three-phase Eurostandard tracks
- Maximum permissible ambient temperature + 35°C



- *Proiettore LED a binario*
- *Corpo in alluminio tornito dal pieno lega 6082 con verniciatura in polvere di poliestere resistente alla corrosione*
- *Vetro di sicurezza temperato con bordi molati, extrachiario ed antiriflesso*
- *Angoli del fascio 20° 30° 48° 86°*
- *Orientabile in senso orizzontale e verticale*
- *Alimentatore integrato nell'adattatore per binario*
- *Compatibile con binari Eurostandard trifase*
- *Temperatura ambiente massima ammissibile +35°C*

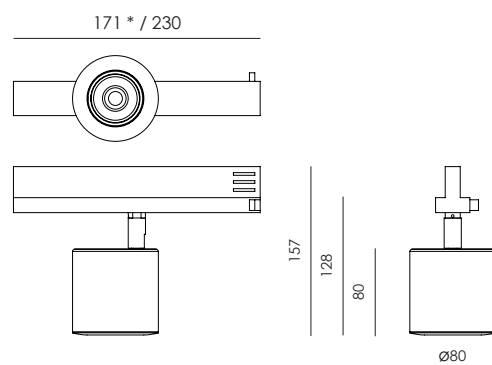

| Lamp /<br>Lampada | Input /<br>Alimentazione | Power /<br>Potenza | Color Tolerance/<br>Tolleranza Cromatica | CRI /<br>CRI |
|-------------------|--------------------------|--------------------|--|--------------|
| 1 LED COB CREE    | 220/240V 50/60Hz         | 10 / 14 / 19 / 25W | 2-SDCM / 3-SDCM                          | 80 MIN       |








\* only for 10W power version / solo per versione con potenza 10W



NEXO LUCE (Factory)  
Strada Mirabella, 10  
46040 Cavriana (MN), ITALY  
T +39 0376 771513 F +39 0376 772235  
sales@nexoluce.com www.nexoluce.com

Made in Italy

© Nexo Luce, a company incorporated in Italy. The logo and the name are the property of Nexo Luce SRL. The present datasheet and its content in whole or in part are the property of Nexo Luce SRL. All rights reserved. We reserve the right to change details and specifications without prior written notice.

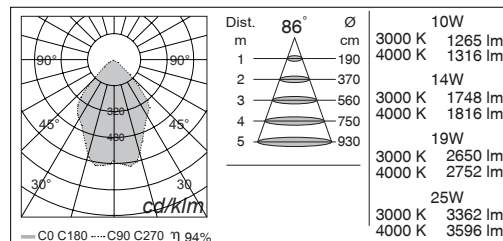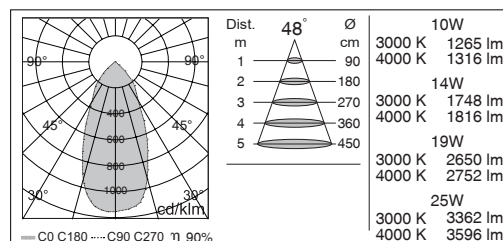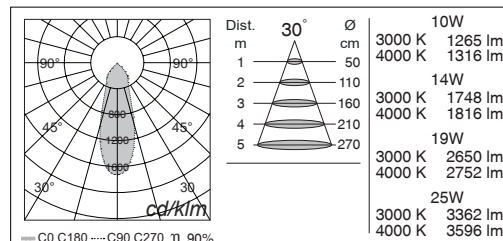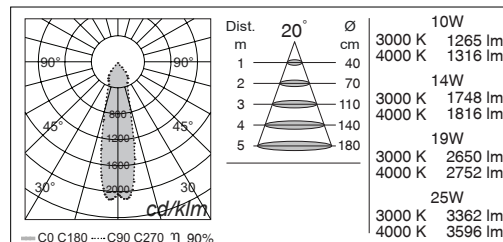

| MAIN CODE<br>CODICE BASE | RELEASE<br>EDIZIONE | LIGHT COLOR<br>COLORE LUCE                  | WATT<br>WATT   | OPTIC<br>OTTICA | CONTROL<br>CONTROLLO | FRAME COLOR<br>COLORE    |
|--------------------------|---------------------|---|----------------|-----------------|----------------------|--------------------------|
| <b>2648</b>              | <b>.1</b>           | <b>B</b> 3000K                              | <b>.10</b> 10W | <b>.D</b> 20°   | <b>1</b> ON/OFF      | <b>BS</b> WHITE / BIANCO |
|                          |                     | <b>C</b> 4000K                              | <b>.14</b> 14W | <b>.F</b> 30°   |                      | <b>BT</b> BLACK/ NERO    |
|                          |                     | * others on request /<br>altri su richiesta | <b>.19</b> 19W | <b>.I</b> 48°   |                      |                          |
|                          |                     |   | <b>.25</b> 25W | <b>BZ</b> 86°   |                      |                          |
|                          |                     |   |                |                 |                      |                          |
|                          |                     |   |                |                 |                      |                          |

CODE EXAMPLE : Projector with warm white light color at 3000K, 10W, 20° optic, ON/OFF control, white color  
2648.1B.10.D1BS

ESEMPIO DI CODIFICA : Proiettore con luce calda a 3000K, 10W, ottica 20°, controllo ON/OFF, colore bianco  
2648.1B.10.D1BS

NEXO LUCE (Factory)  
Strada Mirabella, 10  
46040 Cavriana (MN), ITALY  
T +39 0376 771513 F +39 0376 772235  
sales@nexoluce.com www.nexoluce.com

Made in Italy