

# PANZERI

## Giano

220-240V AC dimmable (DALI/Push DIM)

A24648.050.0402

 black/opal screen




### Data sheet

CODE	A24648.050.0402
SYSTEM POWER CONSUMPTION	19W
EFFICACY	64.63lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 60.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (DALI/Push DIM)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	2280lm
LUMEN OUTPUT	1228lm
EFFICIENCY	53.9%
WEIGHT	1,32 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	14,0 x 65,0 x 14,0 cm



Wall lighting fixture for interiors, with direct and indirect light emission. Extruded aluminium structure in RAL 9003 white or black powder paint. Extruded polycarbonate diffusers with opaline finish. Pickled sheet metal end caps in polyacrylic paint.

### Technical drawing

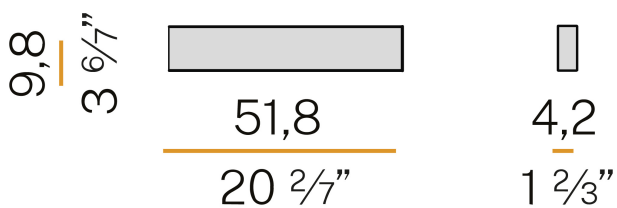

### Polar diagram

