

# PANZERI

## Four

220-240V AC ON-OFF

EP04444.000.0406

● metallized brown




### Data sheet

CODE	EP04444.000.0406
SYSTEM POWER CONSUMPTION	10W
EFFICACY	59.5lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	850lm
LUMEN OUTPUT	595lm
EFFICIENCY	70%
WEIGHT	0,69 Kg
PROTECTION DEGREE	IP44
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	19,0 x 19,0 x 14,0 cm



Ceiling or wall lighting fixture for indoor or outdoor spaces, with direct light emission.  
Ceiling/wall plate in die-cast aluminium in metallized grey polyacrylic paint.  
AISI 316 stainless steel structure in white or metallized brown polyacrylic paint.  
EPDM rubber gasket.  
Aluminium dissipation plate.  
Flat frosted glass diffuser.  
Rubber cable grommet.  
Stainless steel screws.


### Technical drawing

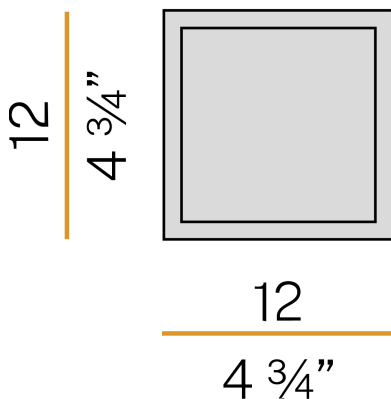

### Application



### Polar diagram

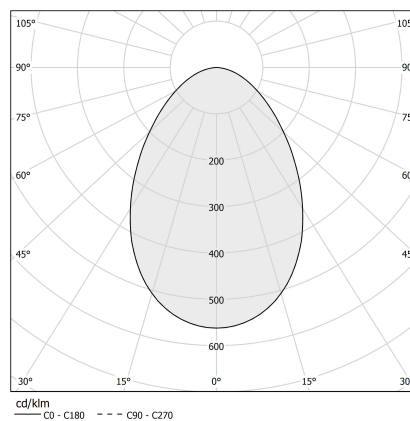

# PANZERI

## Four

### Accessories / dimming

XM14/230

Dimmable device for 230V LED modules, 5×100W.

