





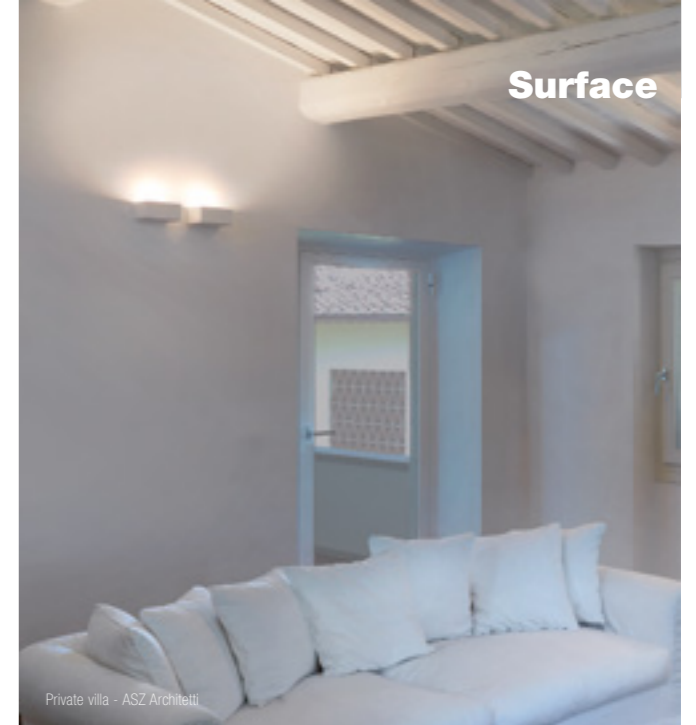

PIPEDINO INDIRECT

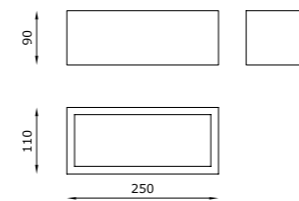

Un'illuminazione che esalta i dettagli, guidando lo sguardo verso l'alto: Pipedino Indirect è una lampada da interni a parete in AirCoral®, un parallelepipedo che lascia pieno potere alla luce, protagonista indiscussa all'interno del progetto architettonico. Valorizzare, giocando con le simmetrie, con le forme e con una potenza visiva senza pari.

A luminaire that exalts the details, guiding the eye upwards: Pipedino Indirect is an indoor wall lamp in AirCoral®, a parallelepiped that gives full power to light, the undisputed protagonist inside the architectural project. Enhancing, while playing with symmetries, with shapes and with an unparalleled visual power.

TECHNICAL FEATURES

	2937.AC	2936.AC
Code	2937.AC	2936.AC
Type	Wall lamp 	Wall lamp 
Material	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	5.47 m²	5.47 m²
Mounting	Wall mounting	Wall mounting
IP rating	IP20	IP20
Insulation class	I	I
Control gear	Electronic ballast	Dimmable constant current driver
Lamp type	TC-DEL 	LED 350 mA 
Lamp wattage	1 x 26W	1 x 6.5W
Luminous efficacy	-	810 lm - 3000K
Light distribution	-	Wide beam 120°
Fitting	G24q-3	-
Light colour	-	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	-	>90
Emergency	-	-
Energy efficiency class	A	A+
Note	-	Trailing-edge and leading-edge dimming (20 - 100%). Satin glass included.

OPTIONAL ACCESSORIES

product code	optional code	description	info
2937.AC	2920	Glass safety screen	Protection IP40

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²