



technics

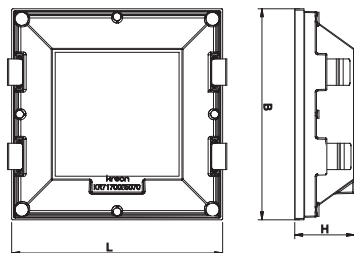

Name

Louvre down 40 double
 Louvre down in line 40
 Louvre down in line 40 IP44
 Louvre down in line 80
 Louvre IP44 down in line 80
 Louvre down in line 120
 Louvre IP44 down in line 120
 Louvre down in line 165



Reference

KR707616 /KR707612
 KR707116 /KR707112
 KR70731x
 KR717116 /KR717112
 KR717316 /KR717312
 KR707216 /KR707212
 KR707416 /KR707412
 KR717216 /KR717212

L x B x H

87x 40 x 12,8
 40 x 40 x 11,3
 40 x 40 x 13
 80 x 80 x 22,5
 90 x 80 x 22,5
 120 x 120 x 34
 120 x 120 x 34
 164 x 164 x 39


1 dimensions

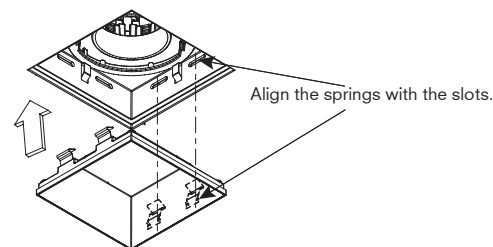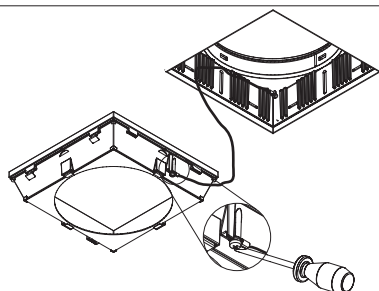


2 installation

In case of 165, fix the fall safety cable with added screw to the louvre.


Insert the louvre in the plasterkit.




In case IP44 louvre.




remove IP44 louvre with suction cup

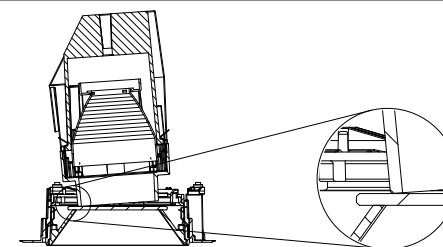

mod 80/120: led module can not rotate when the IP44
 louvre is installed
 mod 40: IP louvre only compatible with downlight.



In case of 40, 80 and 165 version:
 Result without shadow gap, when plasterkit
 KR707104/KR717114/ KR717214 is used.



In case of 80 and 165 version:
 Result with shadow gap, when plasterkit
 KR717118/KR717218 is used.

