BORGO TRIMLESS 200 7567

astro

SKU 1212038



PRODUCT SPECIFICATION

GENERAL

FINISH:Matt WhiteCABLE LENGTH:Not ApplicableMAIN MATERIAL:Metal - Mild SteelGROSS WEIGHT:0.68 (Kg)DIMENSIONS:H:200mm W: 25mm D:65mmCLASS:CE (Class III)

INSTALLATION ORIENTATION: Wall Mount - Vertical IP RATING: IP20

CUT OUT HOLE: H: 260mm W:30mm BATHROOM ZONE: Zone 3

RECESS DEPTH: 65mm VOLTAGE: Constant Current 700 (mA)
FIRE RATING: Not Applicable PRODUCT F MARK: Suitable for mounting on flammable materials

L70:

LAMP

LIGHT SOURCE:High power LEDMACADAM ELIPSE:3-StepMAXIMUM WATTAGE:2WUGR:To Be Ad

2W UGR: To Be Advised MAXIMUM LAMP LENGTH: Not Applicable **BEAM ANGLE:** Not Applicable LAMP INCLUDED? Yes (Integral) TILT ADJUSTMENT ANGLE: Not Applicable **LUMINOUS FLUX:** 56(lm) **ROTATION ADJUSTMENT ANGLE:** Not Applicable **COLOUR TEMP:** 3000 (K) AVERAGE LIFESPAN: 60,000 (Hrs)

CRI: 80 **R9**: 10.9

ELECTRICAL

SWITCHED:NoSUPPLY FREQUENCY:Not ApplicableDIMMABLE:YesDRIVER/BALLAST VOLTAGE:Not ApplicableDIMMING METHOD:Control Gear DependantDRIVER AVERAGE LIFESPAN:Not ApplicableDRIVER OUTPUT CURRENT:Not ApplicableEFFICACY:14.74 (Im/W)

DRIVER OUTPUT CURRENT:Not ApplicableEFFICACY:14.74 (lm/W)DRIVER OUTPUT VOLTAGE:Not ApplicableDRIVER/BALLAST INCLUDED?Not Applicable

ADDITIONAL INFORMATION


BOX QUANTITY x 12


Œ


To Be Advised



Product tested with 1836 - LED Driver CC 250/350/500/700mA DALI Dim



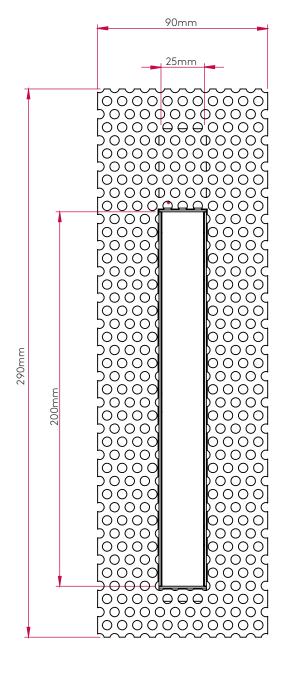

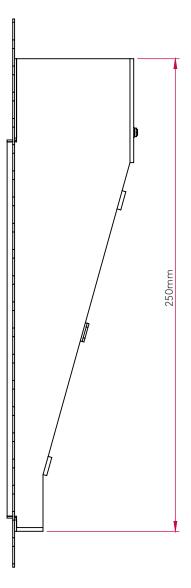

T: +44 (0) 1279 427001 sales@astrolighting.com www.astrolighting.com