

PANZERI

Giano

220-240V AC ON-OFF
A24646.150.0401

 white/opal screen



Data sheet


CODE	A24646.150.0401
SYSTEM POWER CONSUMPTION	56W
EFFICACY	65.77lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 60.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	6840lm
LUMEN OUTPUT	3683lm
EFFICIENCY	53.8%
WEIGHT	3,62 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	14,0 x 180,0 x 14,0 cm



Wall lighting fixture for interiors, with direct and indirect light emission. Extruded aluminium structure in RAL 9003 white or black powder paint. Extruded polycarbonate diffusers with opaline finish. Pickled sheet metal end caps in polyacrylic paint. Equipped with wiring for separate switches for direct only, indirect only or direct and indirect light emission.



Technical drawing

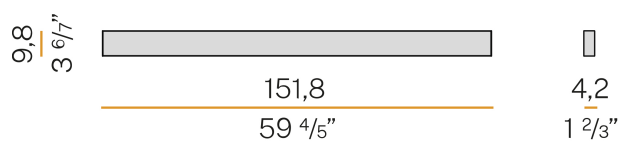

Polar diagram

