


PANZERI

Brooklyn Round

220-240V AC dimmable (DALI/Push DIM)

L23219.180.0402

 mat brass




Data sheet

CODE	L23219.180.0402
SYSTEM POWER CONSUMPTION	55W
EFFICACY	53.9lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 80.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (DALI/Push DIM)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	6840lm
LUMEN OUTPUT	2965lm
EFFICIENCY	43.3%
WEIGHT	3,38 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS	12,0 x 202,0 x 106,0 cm




Suspension lighting fixture for interiors, with direct light emission.
Banded extruded aluminium structure in white, black or mat brass polyacrylic paint.
Extruded polycarbonate diffuser with opaline finish.
Galvanized sheet metal end caps in polyacrylic paint.
Suspension kit with griplocks and 5m (196,9") long steel cables.
5m (196,9") long power cable in transparent PVC.
Power canopy with pickled sheet metal ceiling bracket and covering in white polyacrylic paint.

Technical drawing

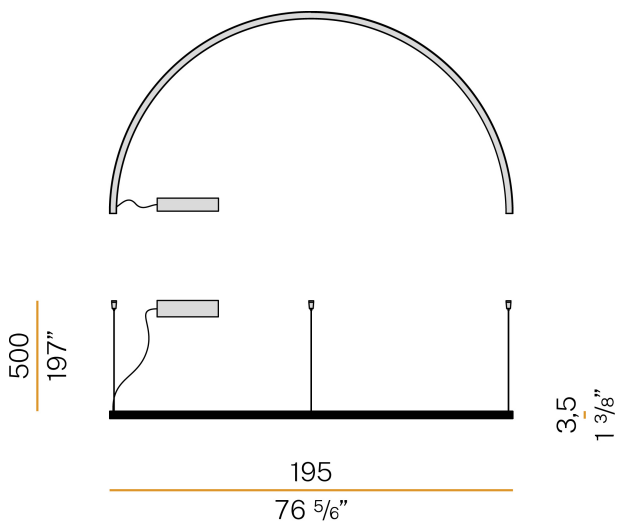

Polar diagram

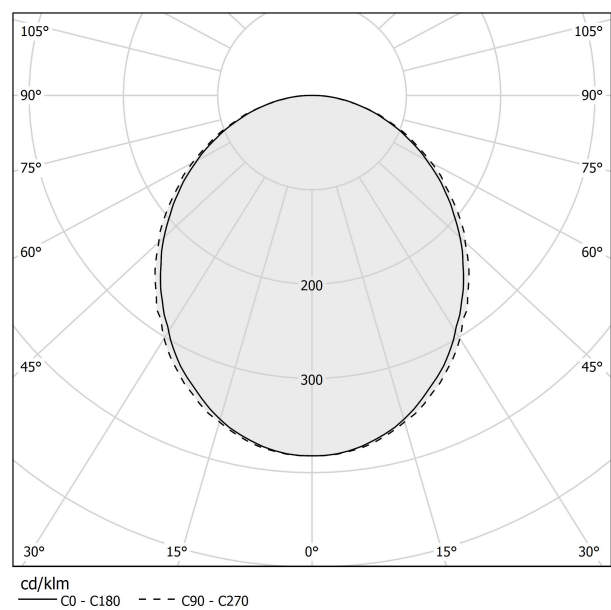


PANZERI

Brooklyn Round

Accessories / power supply


XM150/24 DIM

LED driver, 150W 24V DC, DALI/Push DIM dimmable.



XM60/24 DIM

LED driver, 60W 24V DC, DALI/Push DIM dimmable.




PANZERI

Brooklyn Round

Accessories / power supply and fixing

XM23119.538.0099

Canopy for power supply with 8 outputs and to join 7 steel cables, for up to 8 Brooklyn Round models maximum.



PANZERI

Brooklyn Round

Accessories / fixing

XM231/23219L

Plate for multiple suspensions.

