

## Mark

24V DC  
X01717.080.0410



### Data sheet

CODE	X01717.080.0410
SYSTEM POWER CONSUMPTION	25W
EFFICACY	43.4lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 80.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	3228lm
LUMEN OUTPUT	1085lm
EFFICIENCY	33.6%
WEIGHT	1.49 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	12,0 x 106,0 x 7,0 cm



Lighting fixture for ceiling or wall built-in installation for interiors, with direct light emission.

Built-in structure in plasterboard, in aluminium in white polyacrylic paint.


Reflector in aluminium in white polyacrylic paint.

Pickled sheet metal closing frame in white, black, bronze, mat brass or titanium polyacrylic paint.

Stainless steel spring clips for plasterboard fixing.

Built-in hole dimension: 780x67mm (30,7x2,6")

### Technical drawing

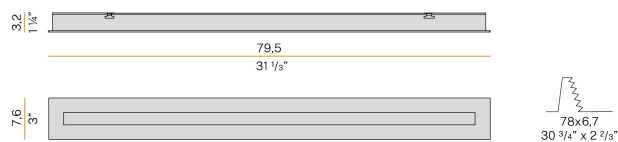

### Application



### Polar diagram

