Private villa · ASZ Architetti

PIPEDINO DIRECT

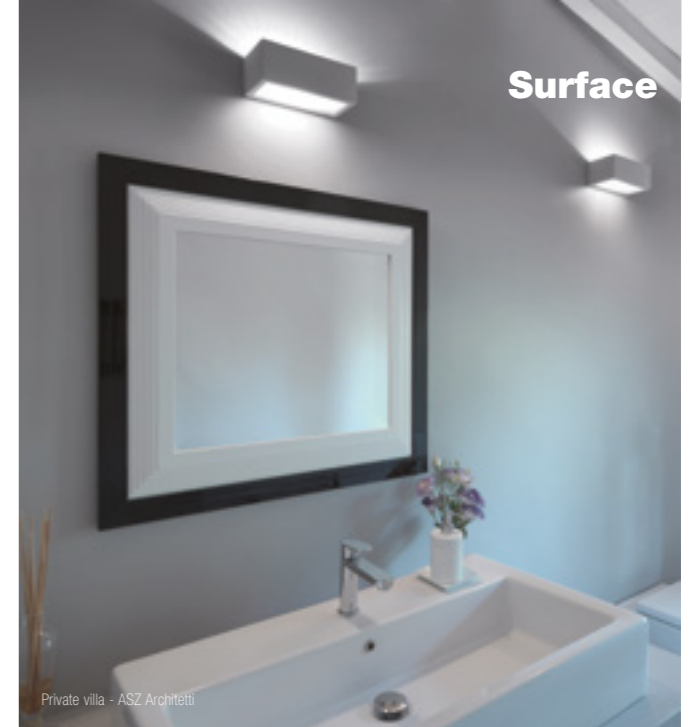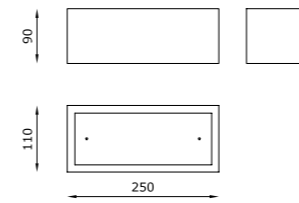CE F P ETL ⌀

Un apparecchio il cui obiettivo è lasciare pieno potere alla bellezza della luce, che si inserisce nello spazio con determinazione: Pipedino Direct è una lampada da parete da interni in AirCoral®.
Il prodotto incontra le superfici e le esalta: la luce, diretta verso il basso, è filtrata dal vetro satinato fissato con viti in policarbonato bianche.

A luminaire whose goal is to give full power to the beauty of light, that enters the space with determination: Pipedino Direct is an indoor wall lamp in AirCoral®, a precious tool in the hands of the designer's mind.
A product that comes together with surfaces, exalting them: the light turns downwards, seeping in through the satin glass fixed with white polycarbonate screws.

TECHNICAL FEATURES

Code	2927.AC	2928.AC
Type	Wall lamp	Wall lamp
Material	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	5.47 m²	5.47 m²
Mounting	Wall mounting	Wall mounting
IP rating	IP40	IP40
Insulation class	I	I
Control gear	Electronic ballast	Dimmable constant current driver
Lamp type	TC-DEL	LED 350 mA
Lamp wattage	1 x 26W	1 x 6.5W
Luminous efficacy	-	810 lm - 3000K
Light distribution	-	Wide beam 120°
Fitting	G24q-3	-
Light colour	-	White 3000K White 2700K | 4000K (on request)
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	-	>90
Emergency	-	-
Energy efficiency class	A	A⁺
Note	Extra white frosted glass fixed with polycarbonate screws.	Extra white frosted glass fixed with polycarbonate screws. Trailing-edge and leading-edge dimming (20 - 100%).

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²